

# CVS Series

# Canopy Vandal Square



CVS Series

### SPECIFICATIONS

- Die Cast Aluminum Housing
- Clear Prismatic Polycarbonate Lens
- White Powder Coat Steel Reflector
- Bronze Powder Coat Finish, Optional Custom Color
- HID Porcelain Medium Base 4KV Socket or CF Plug-In Type, GX24Q (Non LED)
- Stainless Steel Hardware
- Multiple Light Source Options
- 3K, 4K or 5K LED Color Options
- Universal Volt LED Driver with Optional Dimming
- Optional Emergency Battery (CF/LED)
- Optional Photocell
- Optional Surge Protection

### APPLICATIONS

- General Area/Garage Lighting
- Platforms, Walkways, Parking, Tunnels
- Schools and Commercial Buildings

### ELECTRICAL

- 120-277V: LED 23W & 45W & CF 26W, 32W, 42W, 52W, 64W & 84W
- 120V: HPS 50W, 70W, 100W & 150W
- Quad Volt: HPS & MH 50W, 70W, 100W & 150W
- 480V: LED 23W & 45W, HPS & MH 100W & 150W

### INSTALLATION

- Mounts Over Recessed Box or with Surface Conduit

### CERTIFICATIONS/LISTINGS

- CSA Listed
- Listed for Wet Locations

**ALL-SITE  
LIGHTING**

PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_


QTY \_\_\_\_\_ NOTES \_\_\_\_\_ APPROVAL \_\_\_\_\_

### ORDERING/SPECIFYING INFORMATION:

EXAMPLE: CVS M 150 Q L

<b>CVS</b>					
Series					Options
	<b>Light Source</b>				L Lamped
	M Metal Halide				PC Photocell
	H High Pressure Sodium		<b>LED Color</b>		EM 90 Min Battery (CF/LED)
	F Compact Fluorescent		___ Non LED		D10 0-10V Dimming (LED)
	L Light Emitting Diodes		30K 3000K LED		SP Surge Protection
			40K 4000K LED		CC Custom Color
			50K 5000K LED		
		<b>Watts</b>			
		MH HPS CF 2CF LED		<b>Volts</b>	
		50 50 26 52 23		120 120V	
		70 70 32 64 45		UNV 120-277V	
		100 100 42 84		Q 120/208/240/277V	
		150 150		480 480V	

### SPECIFICATIONS

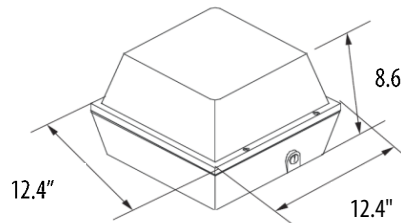

### OPTIONS/ACCESSORIES



Specifications Subject to Change