



EXITM WP Series

SPECIFICATIONS

- Injection Molded Thermoplastic Housing
- Sealed Gasket Housing
- Corrosion Resistant
- Ni-Cad Premium Battery
- Dual Voltage 120/277V
- Remote Capable 3 Watt for 90 Minutes
- Double Face
- LED Light Source
- Ceiling or Wall Mount

APPLICATIONS

- General Emergency Lighting
- Offices, Warehouses, Walkways, Garages
- Ceiling or Wall Mount
- Suitable for Wet Locations

ELECTRICAL

- 120/277V; 60Hz
- 90 Minute Emergency Operation

INSTALLATION

- Ceiling or Wall Mount

CERTIFICATIONS/LISTINGS

- UL Listed
- Listed for Wet Locations




PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: EXITM W R BU WP

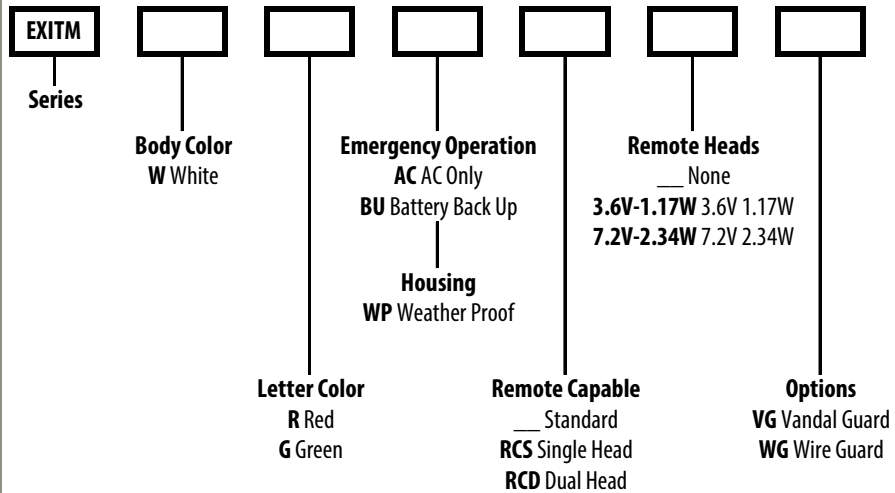

SPECIFICATIONS

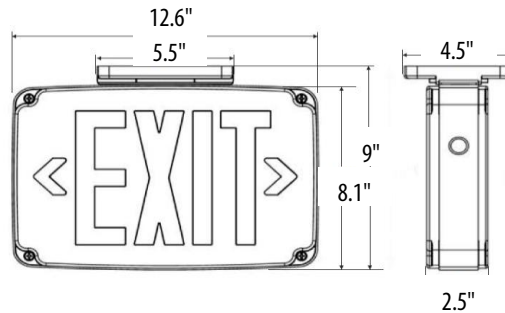

OPTIONS/ACCESSORIES




VG Vandal Guard




WG Wire Guard



RCD Remote Dual

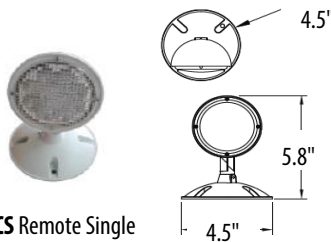

RCS Remote Single

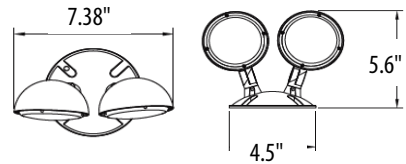

Specifications Subject to Change

