LED Specification Exit



EXITS Series

SPECIFICATIONS

- Injection Molded Thermoplastic Housing
- LED Charge Indicator
- Push to Test Switch
- 6V Lead Acid Battery, Maintenance Free
- Snap In/Out Chevron Direction Indicators
- Single Face or Double Face (Blank Included)
- LED Light Source
- Universal Mount

APPLICATIONS

- General Emergency Lighting
- Offices, Warehouses, Walkways, Garages
- Wall or Ceiling Mount
- Suitable for Outside Covered Applications

ELECTRICAL

- 120/277V 60Hz
- 90 Minute Emergency Operation


INSTALLATION


• Wall or Ceiling Mount

CERTIFICATIONS/LISTINGS

- UL Listed
- · Listed for Damp Locations



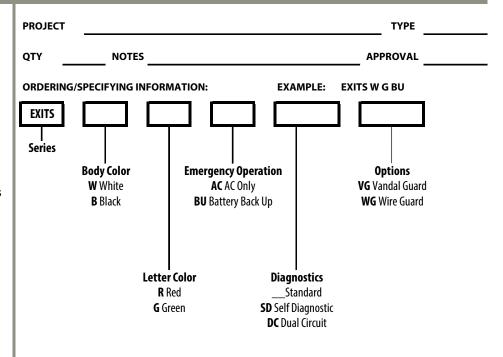

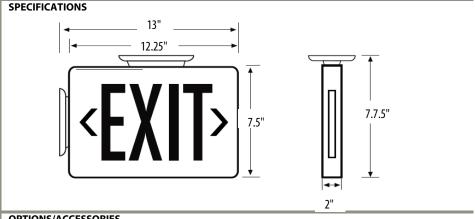

OPTIONS/ACCESSORIES



