

FLH Series

Large Horizontal Flood



FLH Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Tempered Clear Flat Glass Lens
- Aluminum Reflector (Non LED)
- Uniformed Poured Silicone Gasket
- Bronze Powder Coat Finish, Optional Custom Color
- HID Porcelain Mogul Base 5KV Socket or CF Plug-In Type, GX24Q (Non LED)
- Stainless Steel Hardware
- Multiple Light Source Options
- 3K, 4K or 5K LED Color Options
- Universal Volt LED Driver with Optional Dimming
- Optional Surge Protection
- Optional Wire Guard, Glare Shield or Vandal Guard

APPLICATIONS

- General Area/Flood Lighting
- Walkways, Parking, Roadway, Area
- Schools, Commercial Buildings, Communities
- Street Lighting, Car Lots, Campuses

ELECTRICAL

- Quad Volt: HPS 100W, 150W, 250W & 400W, MH 100W & 150W & PMH 250W, 320W & 400W
- UNV: 120-277V: CF 84W & LED 68W
- 480V: LED 68W, HPS 100W, 150W, 250W & 400W, MH 100W & 150W & PMH 250W, 320W & 400W

INSTALLATION

- Mounts with a Adjustable Slip Fitter, U-Bracket or Large Yoke

CERTIFICATIONS/LISTINGS

- CSA Listed
- Listed for Wet Locations



PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:


EXAMPLE: FLH P 400 Q L

FLH					
Series					Options
	Light Source		LED Color		L Lamped
	H High Pressure Sodium		___ Non LED		SP Surge Protection
	M Metal Halide		30K 3000K LED		D10 0-10V Dimming (LED)
	P Pulse Start Metal Halide		40K 4000K LED		ASF Adjustable Slip Fitter
	F Compact Fluorescent		50K 5000K LED		UB U-Bracket
	L Light Emitting Diodes				LY Large Yoke
					WG Wire Guard
					GS Glare Shield
					VG Vandal Guard
					CC Custom Color
		Watts		Volts	
		HPS MH PMH CF LED		UNV 120-277V	
		100 100 250 84 68		Q 120/208/240/277V	
		150 150 320		480 480V	
		250 400			
		400			

SPECIFICATIONS

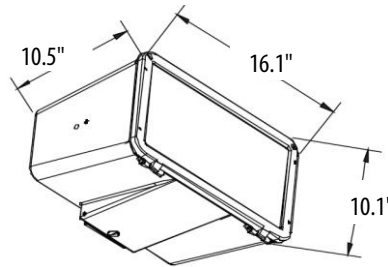

OPTIONS/ACCESSORIES

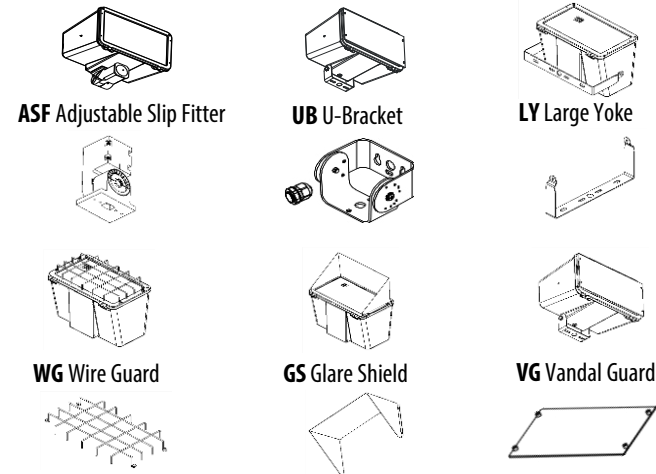

Specifications Subject to Change

