



VP Series

**SPECIFICATIONS**

- Fiberglass Housing
- Highly Reflective White Enamel Finish
- High Impact Acrylic Lens
- Poured Neoprene Gasketing
- T12, T8 or T5 Lamp Fluorescent
- Available in 2', 4' or 8' Lengths
- Units Equipped with Knockouts and Holes for Pendant Mounting (Conduit by Others)

**APPLICATIONS**

- General Area Lighting
- Parking Garages, Industrial Facilities, Stairwells
- Schools, Canopies, Storage Areas, Warehouses

**ELECTRICAL**

- 120-277V; 50/60Hz

**INSTALLATION**

- Surface or Pendant Mount (Conduit by Others)

**CERTIFICATIONS/LISTINGS**


- UL Listed
- Listed Damp Locations

PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_


QTY \_\_\_\_\_ NOTES \_\_\_\_\_ APPROVAL \_\_\_\_\_

**ORDERING/SPECIFYING INFORMATION:**

**EXAMPLE:** VP 4' 2 F32T8 UNV L841

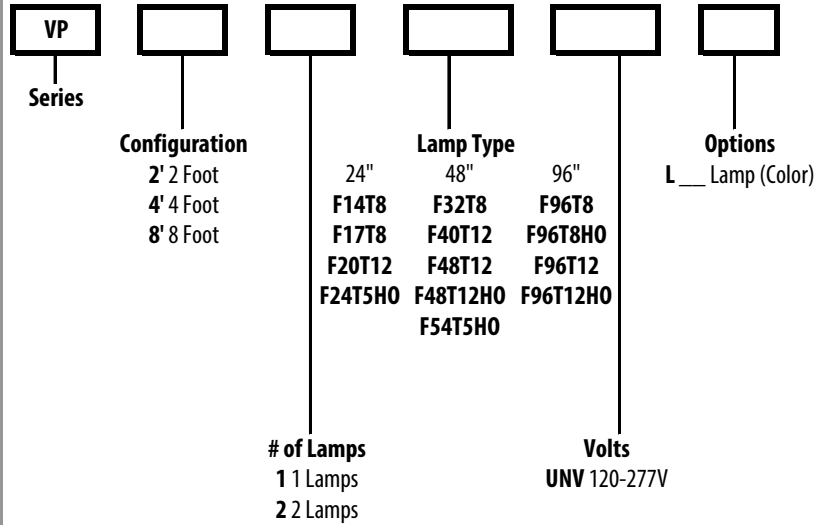

**SPECIFICATIONS**

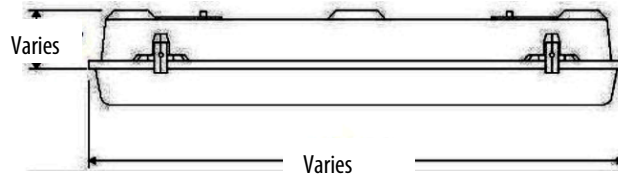

**OPTIONS/ACCESSORIES**

MEMPHIS  
LIGHTING

Specifications Subject to Change

