

WPL Series

Large Glass Wall Pack



WPL Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Borosilicate Molded Glass Lens
- Bronze Powder Coat Finish, Optional Custom Color
- Hinged Door Frame
- Uniform Poured Silicone Gaskets
- Stainless Steel Hardware
- Multiple Light Source Options
- 3K, 4K or 5K LED Color Options
- Universal Volt LED Driver with Optional Dimming
- Optional Emergency Battery (CF/LED)
- Optional Photocell
- Optional Surge Protection
- Optional Vandal Guard, Wire Guard, Glare Shield and Full Cut Off

APPLICATIONS

- General Area, Facade Lighting, Entry Lighting
- Platforms, Walkways, Parking, Tunnels
- Schools and Commercial Buildings
- Commercial, Warehouse, Industrial Facilities

ELECTRICAL

- 120-277V: LED 58W & CF 26W, 32W, 42W, 52W 64W & 84W
- 120V: HPS 100W & 150W
- Quad Volt: MH 70W, 100W & 150W, PMH 250W HPS 100W, 150W & 250W
- 480V: MH 70W, 100W & 150W, PMH 250W HPS 100W, 150W & 250W & LED 58W

INSTALLATION

- Mounts Over Recessed Box or with Surface Conduit

CERTIFICATIONS/LISTINGS

- CSA Listed
- Listed for Wet Locations

**ALL-SITE
LIGHTING**

PROJECT _____ TYPE _____

QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:



WPL
Series

Light Source

- M Metal Halide
- P Pulse Start Metal Halide
- H High Pressure Sodium
- F Compact Fluorescent
- L Light Emitting Diodes

LED Color

- ___ Non LED
- 30K 3000K LED
- 40K 4000K LED
- 50K 5000K LED

Watts

MH	PMH	HPS	CF	2CF	LED
70	250	100	26	52	58
100		150	32	64	
150		250	42	84	

EXAMPLE: WPL P 250 Q L


Options

- L Lamped
- PC Photocell
- EM 90 Min Battery (CF/LED)
- D10 0-10V Dimming (LED)
- SP Surge Protection
- GS Glare Shield
- FC Full Cut Off
- VG Vandal Guard
- WG Wire Guard
- CC Custom Color


Volts

120	120V
UNV	120-277V
Q	120/208/240/277V
480	480V

SPECIFICATIONS

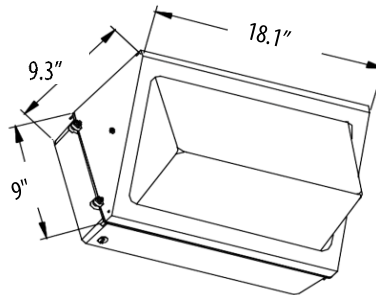

OPTIONS/ACCESSORIES

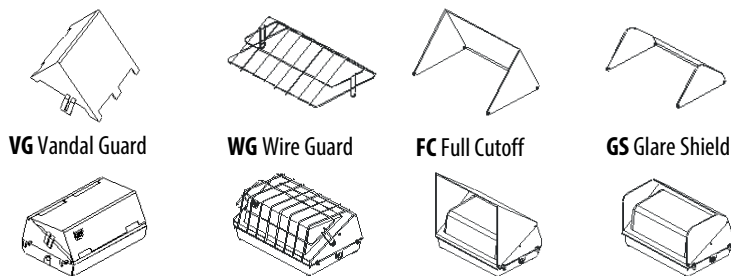

Specifications Subject to Change

**AMERICA
LIGHT**

America Light, Inc 1489 W 13th St Riviera Beach FL 33404 Phone 561.296.0364 Sales@AmericaLight.com