

ABM Series

Aero Beam Medium Parking and Area



ABM Series

SPECIFICATIONS

- Die Cast Aluminum Housing and Front Frame
- Tempered Clear Flat Glass Lens
- Aluminum Cutoff Reflector (Non LED)
- Uniformed Poured Silicone Gasket
- Bronze Powder Coat Finish, Optional Custom Color
- HID Porcelain Medium Base 4KV Socket (Non LED)
- Stainless Steel Hardware
- Multiple Light Source Options
- Universal Volt Electronic LED Driver 120-277V
- 3K, 4K or 5K LED Color Options
- Optional Glare Shield

APPLICATIONS

- General Area/Pathway Lighting
- Walkways, Parking, Roadway, Area
- Schools, Commercial Buildings, Communities
- Street Lighting, Car Lots, Campuses

ELECTRICAL

- UNV 50/60Hz: LED 37W
- Quad Volt: HPS 35W, 50W, 70W, 100W & 150W & MH 50W, 70W, 100W & 150W
- 480V: HPS & MH 70W, 100W & 150W & LED 37W
- 120V: HPS 35W, 50W, 70W, 100W & 150W

INSTALLATION

- Mounts Direct to a Square Pole, Optional Round Pole Adapter or Wall Bracket

CERTIFICATIONS/LISTINGS

- CSA Listed
- Listed for Wet Locations

**ALL-SITE
LIGHTING**

PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: ABM M 150 T3 Q

ABM						
Series						
	Light Source		Distribution		Volts	
	H High Pressure Sodium		T2 Type II		120 120V	
	M Metal Halide		T3 Type III		UNV 120-277V	
	L Light Emitting Diodes				480 480V	
					Q 120/208/240/277V	
		Watts		LED Color		Options
		HPS MH LED		___ Non LED		RPA Round Pole Adapter
		35 50 37		30K 3000K LED		WB Wall Bracket
		50 70		40K 4000K LED		GS Glare Shield
		70 100		50K 5000K LED		CC Custom Color
		100 150				
		150				

SPECIFICATIONS

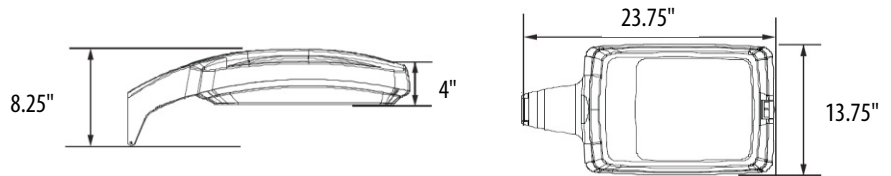

OPTIONS/ACCESSORIES



RPA Round Pole Adapter



WB Wall Bracket



GS Glare Shield

Specifications Subject to Change

