



**IN Series**

**SPECIFICATIONS**

- Heavy Gauge Cold Rolled Steel Housing
- Phosphate Coating Baked White Enamel Finish
- Highly Efficient Fixture
- Minimum 87% Reflectivity
- T12, T8 or T5 Lamp Fluorescent Types Available
- LED T8 (BC) Ballast Capitable or (BP) By-Pass
- Available in 3', 4', 6' & 8' Lengths
- Units Equipped with Knockouts and Holes for Pendant Mounting (Conduit by Others)
- Optional Lamped
- Optional Fuse
- Optional Emergency Battery

**APPLICATIONS**

- General Area Lighting
- Warehouse, Industrial, Gymnasium, Commercial Facilities, Convention Centers, Garages
- Retail, Shopping Malls, Recreational Areas

**ELECTRICAL**

- 120-277V; 50/60Hz

**INSTALLATION**

- Surface, Chain or Pendant Mount (Conduit by Others)

**CERTIFICATIONS/LISTINGS**

- UL Listed


**MEMPHIS LIGHTING**

PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_


QTY \_\_\_\_\_ NOTES \_\_\_\_\_ APPROVAL \_\_\_\_\_

**ORDERING/SPECIFYING INFORMATION:**

EXAMPLE: IN 2 F32T8 UNV L841

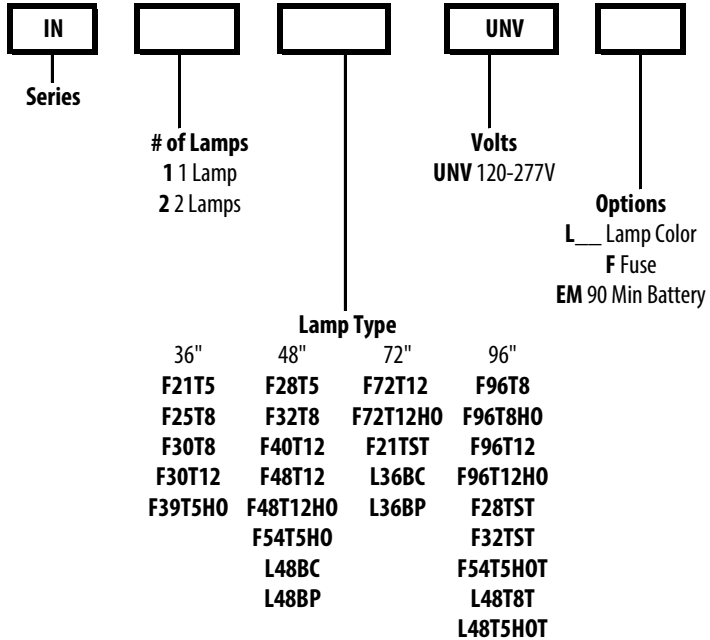

**SPECIFICATIONS**

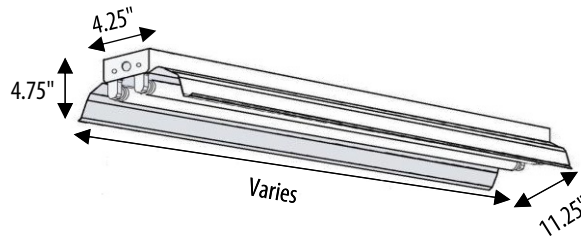

**OPTIONS/ACCESSORIES**

*Specifications Subject to Change*

