

BBR LED Series



BBR LED Series

SPECIFICATIONS

- Extruded Aluminum Housing
- Die Cast Aluminum Base and Top
- Reflective White Internal Cone Reflector
- Clear Polycarbonate Lens
- Bronze, White or Black Powder Coat Finish, Optional Custom Color
- CRI LED COB
- Universal Volt LED Driver 120-277V, Optional 480V
- 4100K LED Color
- Optional House Side Shield
- Optional Surge Protection
- Optional Dimming
- Optional Emergency Battery Pack
- 50,000 Hour Life with 3 Year LED Warranty

APPLICATIONS

- General Area/Pathway Lighting
- Entries, Walkways, Pathways, Area
- Schools, Hospitals, Office, Commercial Buildings
- Ingress/Egress, Campuses

ELECTRICAL

- 120-277V; 50/60Hz
- Optional 480V; 50/60Hz
- COB 20 Watts; 2,282 Lumens

INSTALLATION

- Bolt to Concrete Base or Use Direct Bury Base Option

CERTIFICATIONS/LISTINGS

- CSA Listed
- IP66
- Listed for Wet Locations

CRI LED

Beacon LED Round Bollard

PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: BBR 20 41K UNV BZ

BBR	L	20	41K			
Series	Light Source L Light Emitting Diodes	Watts 20 20 Watts	LED Color 41K 4100K LED	Volts UNV 120-277V 480 480V	Color BZ Bronze WH White BK Black CC Custom Color	Options HSS House Side Shield DBB Direct Bury Base AB Anchor Bolts "Custom Height 18" to 36" SP Surge Protection D10 0-10V Dimming EM 90 Min Emergency Pack

SPECIFICATIONS

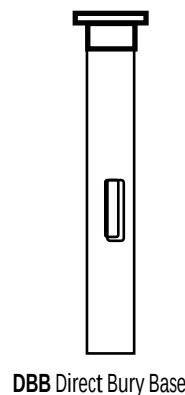

DBB Direct Bury Base

OPTIONS/ACCESSORIES



AB Anchor Bolts



HSS House Side Shield

**AMERICA
LIGHT**

Specifications Subject to Change

America Light, Inc 1489 W 13th St Riviera Beach FL 33404 Phone 561.296.0364 Sales@AmericaLight.com