

# BLS Series

# Stainless Round Dome Top Bollard with Louvers



**BLS Series**

**SPECIFICATIONS**

- Formed Stainless Steel Housing
- Cast Aluminum Louvers
- Clear Polycarbonate Lens
- Stainless Steel Finish
- HID Porcelain Medium Base 4KV Socket or CF Plug-In Type, GX24Q (Non LED)
- Stainless Steel Hardware
- Multiple Light Source Options
- Various Wattages Available
- 3K, 4K, 5K or Turtle LED Color Options
- Optional House Side Shield
- Optional Surge Protection

**APPLICATIONS**

- General Area/Pathway Lighting
- Entries, Walkways, Pathways, Area
- Schools, Hospitals, Offices, Commercial Buildings
- Ingress/Egress, Campuses

**ELECTRICAL**

- 120-277V 50/60Hz: LED 15W & CF 42W & 57W
- Quad: MH & HPS 50W, 70W, 100W
- 480V: MH & HPS 70W & 100W & LED 15W
- 120V: HPS 35W, 50W, 70W & 100W

**INSTALLATION**

- Bolt to Concrete Base or Use Direct Bury Option

**CERTIFICATIONS/LISTINGS**

- CSA Listed
- Listed for Wet Locations




PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_



QTY \_\_\_\_\_ NOTES \_\_\_\_\_ APPROVAL \_\_\_\_\_

**ORDERING/SPECIFYING INFORMATION:**

**EXAMPLE: BLS M 100 Q SS L**

<b>BLS</b>						
Series						
	<b>Light Source</b> M Metal Halide H High Pressure Sodium F Compact Fluorescent L Light Emitting Diodes		<b>LED Color</b> ___ Non LED 30K 3000K LED 40K 4000K LED 50K 5000K LED TFL Turtle LED 		<b>Color</b> SS Stainless Steel	
		<b>Watts</b>		<b>Volts</b>		<b>Options</b>
		MH HPS CF LED		UNV 120-277V		No Lamp L Lamped
		50 35 42 15		Q 120/208/240/277V		HSS House Side Shield DBB Direct Bury Base
		70 50 57		480 480V		AB Anchor Bolts
		100 70		120 120V		" Custom Height 18"-36" SP Surge Protection
		100				

**SPECIFICATIONS**

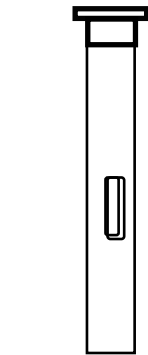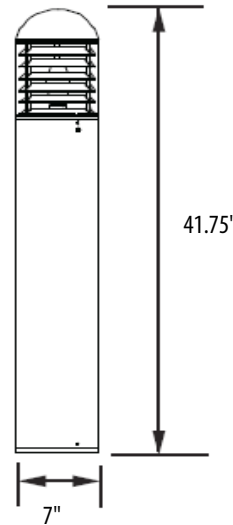

**DBB Direct Bury Base**

**OPTIONS/ACCESSORIES**



**AB Anchor Bolts**



**HSS House Side Shield**



Specifications Subject to Change