

CVSM LED Series

LED Medium Canopy Vandal Square



CVSM LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Clear Prismatic Polycarbonate Lens
- Bronze Powder Coat Finish, Optional Custom Color
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V
- 3K, 4K or 5K LED Color Options
- Stainless Steel Hardware
- Optional Emergency Battery
- Optional Surge Protection
- Optional Dimming
- Optional Photocell

APPLICATIONS

- General Area/Garage Lighting
- Platforms, Walkways, Parking, Tunnels
- Schools and Commercial Buildings

ELECTRICAL

- 120-277V; 50/60Hz
- 23 Watts; 3,344 Lumens

INSTALLATION

- Mounts Over Recessed Box or with Surface Conduit

CERTIFICATIONS/LISTINGS

- CSA Listed
- IP65
- Listed for Wet Locations

PROJECT _____ TYPE _____

QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: CVSM L 23 30K UNV



CVSM

L

23

[]

UNV

[]

Series

Light Source
L Light Emitting Diodes


LED Color
30K 3000K LED
40K 4000K LED
50K 5000K LED

Nominal Watts
23 23 Watts

Volts
UNV 120-277V

Options
EM 90 Min Battery
SP Surge Protection
D10 0-10V Dimming
PC Photocell
CC Custom Color

SPECIFICATIONS

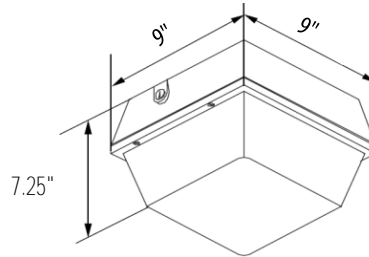

OPTIONS/ACCESSORIES



Specifications Subject to Change

