



EMW LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Borosilicate Tempered Glass Lens
- Bronze Powder Coat Finish
- CRI LED Light Engine
- Universal Volt 120-277V, Optional 480V
- 4K or 5K LED Color Options
- Corrosion Resistant Hardware
- Fully Sealed and Gasketed
- Optional Photocell
- Optional Dimming

APPLICATIONS

- General Area, Facade Lighting, Entry Lighting
- Platforms, Walkways, Parking, Tunnels
- Schools and Universities
- Commercial, Warehouse, Industrial Facilities

ELECTRICAL

- 120-277V; 50/60Hz
- Optional 480V; 50/60Hz
- 40 Watts; 4,600 Lumens
- 50 Watts; 5,800 Lumens
- 60 Watts; 7,000 Lumens
- 80 Watts; 9,800 Lumens

INSTALLATION

- Mounts Over Recessed Box or with Surface Conduit

CERTIFICATIONS/LISTINGS

- UL Listed
- IP65
- Listed for Wet Locations




PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: EMW L 40 40K UNV

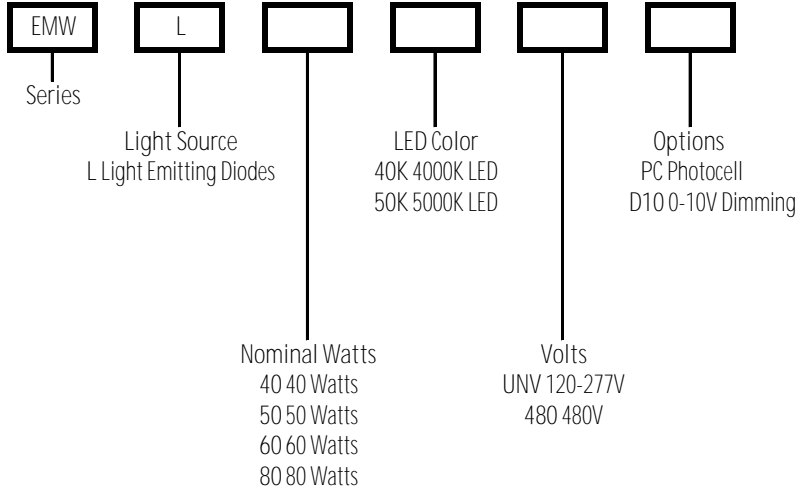

SPECIFICATIONS

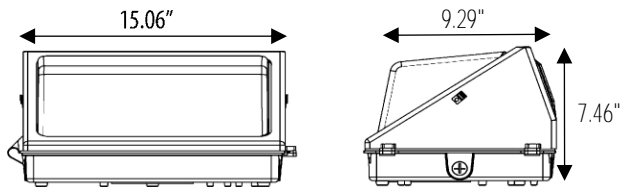

OPTIONS/ACCESSORIES



Specifications Subject to Change