

# FLR LED Series

# LED Round Back Flood



FLR LED Series

### SPECIFICATIONS

- Die Cast Aluminum Housing
- Tempered Clear Flat Glass Lens
- Bronze Powder Coat Finish, Optional Custom Color
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V, Optional 480V
- 3K, 4K or 5K LED Color Options
- Optional Surge Protection
- Optional Dimming
- Optional Wire Guard, Glare Shield or Vandal Guard

### APPLICATIONS

- General Area/Flood Lighting
- Walkways, Parking, Roadway, Area
- Schools, Commercial Buildings, Communities
- Street Lighting, Car Lots, Campuses

### ELECTRICAL

- 120-277V; 50/60Hz
- Optional 480V; 50/60Hz
- 40 Watts; 4,064 Lumens

### INSTALLATION

- Mounts with 1/2" Threaded Knuckle or  
Optional Adjustable Slip Fitter

### CERTIFICATIONS/LISTINGS

- CSA Listed
- IP65
- Listed for Wet Locations




PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_


QTY \_\_\_\_\_ NOTES \_\_\_\_\_ APPROVAL \_\_\_\_\_

### ORDERING/SPECIFYING INFORMATION:


EXAMPLE: FLR L 40 40K UNV

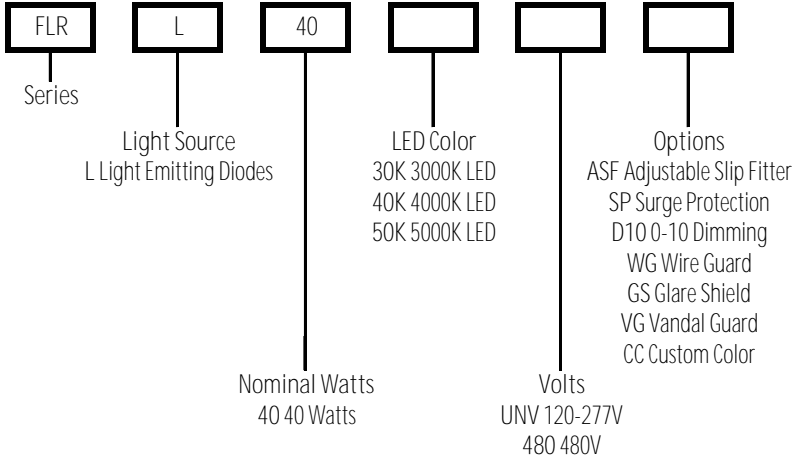


### SPECIFICATIONS



### OPTIONS/ACCESSORIES




ASF Adjustable Slip Fitter




WG Wire Guard



GS Glare Shield



VG Vandal Guard



Specifications Subject to Change

