



SLF LED Series

**SPECIFICATIONS**

- Die Cast Aluminum Housing
- Impact Resistant Polycarbonate Lens
- Bronze Powder Coat Finish, Optional Custom Color
- CRI LED Module
- Universal Volt Electronic Driver 120-277V
- 3K or 5K LED Color Options
- Integral Heat Sinking

**APPLICATIONS**

- General Area Lighting/Sign Lighting
- Industrial Parks, Public Transportation, Airports
- Office Buildings, Medical Facilities, Communities

**ELECTRICAL**

- 120-277V; 50/60Hz
- 50 Watts; 5,411 Lumens; 3000K
- 50 Watts; 6,103 Lumens; 5000K

**INSTALLATION**

- Mounts with 1/2" Threaded Knuckle or Optional Yoke Mount

**CERTIFICATIONS/LISTINGS**


- UL Listed
- IP65
- Listed for Wet Locations

PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_


QTY \_\_\_\_\_ NOTES \_\_\_\_\_ APPROVAL \_\_\_\_\_

**ORDERING/SPECIFYING INFORMATION:**

EXAMPLE: SLF L 50 30K UNV

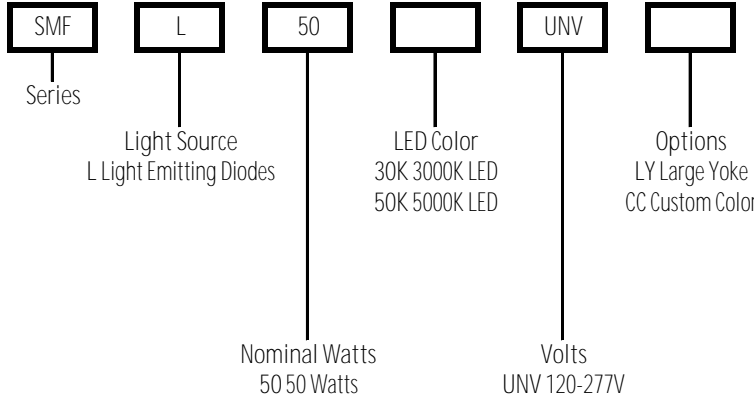

**SPECIFICATIONS**

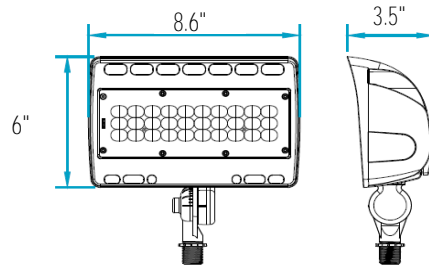

**OPTIONS/ACCESSORIES**



LY Large Yoke



Specifications Subject to Change

