

WFS Series

Small Full Cut Off Wall Pack



WFS Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Tempered Clear Flat Glass Lens
- Full Cut Off Front Frame
- Internal Aluminum Reflector (Non LED)
- Bronze Powder Coat Finish, Optional Custom Color
- HID Porcelain Medium Base 4KV Socket or CF Plug-In Type, GX24Q (Non LED)
- Stainless Steel Hardware
- Multiple Light Source Options
- 3K, 4K, 5K or Turtle Amber LED Color Options
- Universal Volt LED Driver with Optional Dimming
- Skylight Friendly
- Optional Emergency Battery (CF/LED)
- Optional Photocell
- Optional Surge Protection

APPLICATIONS

- General Area, Facade Lighting, Entry Lighting
- Platforms, Walkways, Parking, Tunnels
- Schools and Universities
- Commercial, Warehouse, Industrial Facilities

ELECTRICAL

- 120-277V: LED 22W & CF 26W, 32W & 42W
- 120V: HPS 35W, 50W, 70W & 100W
- Quad Volt: HPS 50W, 70W & 100W & MH 50W, 70W & 100W

INSTALLATION

- Mounts Over Recessed Box or with Surface Conduit

CERTIFICATIONS/LISTINGS

- CSA Listed
- Listed for Wet Locations

**ALL-SITE
LIGHTING**


PROJECT _____ TYPE _____

QTY _____ NOTES _____ APPROVAL _____


ORDERING/SPECIFYING INFORMATION:

EXAMPLE: WFS M 100 Q L



Series	Light Source	Watts	LED Color	Volts	Options
M Metal Halide	H High Pressure Sodium	MH 50	___ Non LED	120 120V	L Lamped
F Compact Fluorescent	L Light Emitting Diodes	HPS 35	30K 3000K LED	UNV 120-277V	PC Photocell
L Light Emitting Diodes		CF 26	40K 4000K LED	Q 120/208/240/277V	EM 90 Min Battery (CF/LED)
		HPS 50	50K 5000K LED		D10 0-10V Dimming (LED)
		CF 32	TFL Turtle LED 		SP Surge Protection
		HPS 70			CC Custom Color
		CF 42			
		LED 22			
		HPS 100			
		CF 26			
		HPS 35			
		CF 32			
		HPS 50			
		CF 42			
		LED 22			

SPECIFICATIONS

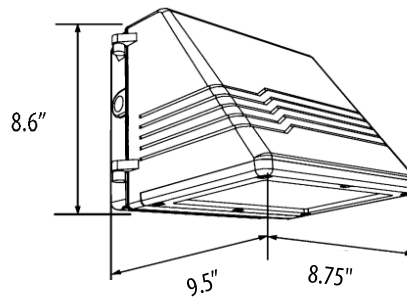

OPTIONS/ACCESSORIES

Specifications Subject to Change

