


WPP Amber LED Series

LED Polycarbonate Wall Pack Amber



WPP LED Series

SPECIFICATIONS

- Die Cast Aluminum Back Plate
- Bronze Polycarbonate Front Housing
- Clear Prismatic Polycarbonate Lens
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V
- Monochromatic Amber LED Light
- Turtle Friendly, LED's Operates Between 585 Nanometers and 595 Nanometers
- Photocell Included
- Optional Surge Protection
- Optional Dimming

APPLICATIONS

- General Area, Facade Lighting, Entry Lighting
- Platforms, Walkways, Parking, Tunnels
- Schools and Universities
- Commercial, Warehouse, Industrial Facilities

ELECTRICAL

- 120-277V 50/60Hz
- 13 Watts; 989 Lumens

INSTALLATION

- Mounts Over Recessed Box or with Surface Conduit

CERTIFICATIONS/LISTINGS

- CSA Listed
- IP65
- Listed for Wet Locations




PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: WPP L 13 TFL UNV

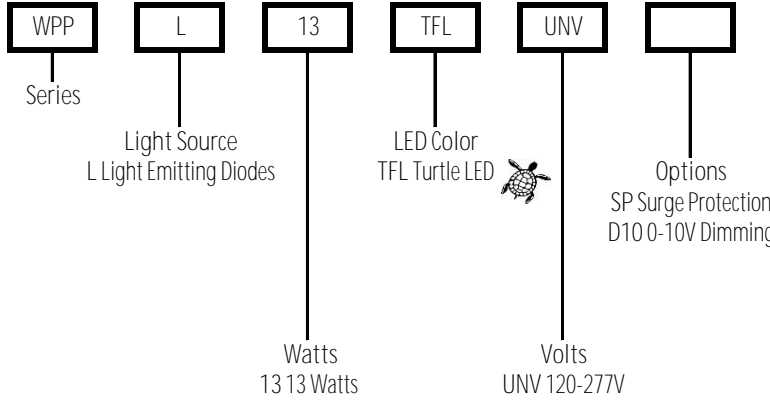

SPECIFICATIONS



OPTIONS/ACCESSORIES



Specifications Subject to Change