

FLM Series

Medium Flood



FLM Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Tempered Clear Flat Glass Lens
- Aluminum Reflector (Non LED)
- Uniformed Poured Silicone Gasket
- Bronze Powder Coat Finish, Optional Custom Color
- HID Porcelain Medium Base 4KV Socket or CF Plug-In Type, GX24Q (Non LED)
- Stainless Steel Hardware
- Multiple Light Source Options
- 3K, 4K or 5K LED Color Options
- Universal Volt LED Driver with Optional Dimming
- Optional Surge Protection
- Optional Wire Guard, Glare Shield or Vandal Guard

APPLICATIONS

- General Area/Flood Lighting
- Walkways, Parking, Roadway, Area
- Schools, Commercial Buildings, Communities
- Street Lighting, Car Lots, Campuses

ELECTRICAL

- 120V: HPS 35W, 50W, 70W, 100W & 150W
- UNV: CF 26W, 32W, 42W, 52W & 64W & LED 37W
- Quad Volt: HPS & MH 50W, 70W, 100W & 150W
- 480V: LED 37W & HPS & MH 100W & 150W

INSTALLATION

- Mounts with 1/2" Threaded Knuckle or Optional Adjustable Slip Fitter

CERTIFICATIONS/LISTINGS

- CSA Listed
- Listed for Wet Locations

ALL-SITE LIGHTING

PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:


EXAMPLE: FLM M 150 Q L

FLM					
Series	Light Source		LED Color		Options
	H High Pressure Sodium M Metal Halide F Compact Fluorescent L Light Emitting Diodes		___ Non LED 30K 3000K LED 40K 4000K LED 50K 5000K LED		L Lamped ASF Adjustable Slip Fitter SP Surge Protection D10 0-10V Dimming (LED) WG Wire Guard GS Glare Shield VG Vandal Guard CC Custom Color
		Watts		Volts	
		HPS MH CF 2CF LED		120 120V UNV 120-277V Q 120/208/240/277V 480 480V	
		35 50 26 52 37 50 70 32 64 70 100 42 100 150 150			


SPECIFICATIONS

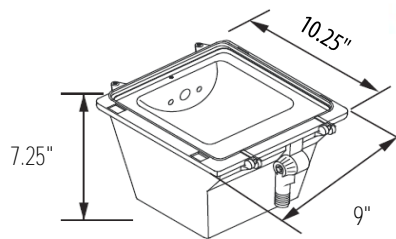

OPTIONS/ACCESSORIES




ASF Adjustable Slip Fitter






WG Wire Guard



GS Glare Shield



VG Vandal Guard



Specifications Subject to Change