



FLS LED Series

**SPECIFICATIONS**

- Die Cast Aluminum Housing
- Tempered Clear Flat Glass Lens
- Bronze Powder Coat Finish, Optional Custom Color
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V, Optional 480V
- 3K, 4K or 5K LED Color Options
- Optional Surge Protection
- Optional Dimming
- Optional Wire Guard, Glare Shield or Vandal Guard

**APPLICATIONS**

- General Area Lighting/Flood Lighting
- Walkways, Parking, Roadway, Area
- Schools, Commercial Building, Communities
- Street Lighting, Car Lots, Campuses

**ELECTRICAL**

- 120-277V; 50/60Hz
- Optional 480V; 50/60Hz
- 22 Watts; 2,123 Lumens

**INSTALLATION**

- Mounts with 1/2" Threaded Knuckle

**CERTIFICATIONS/LISTINGS**

- CSA Listed
- IP65
- Listed for Wet Locations




PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_


QTY \_\_\_\_\_ NOTES \_\_\_\_\_ APPROVAL \_\_\_\_\_

**ORDERING/SPECIFYING INFORMATION:**


EXAMPLE: FLS L 22 50K UNV

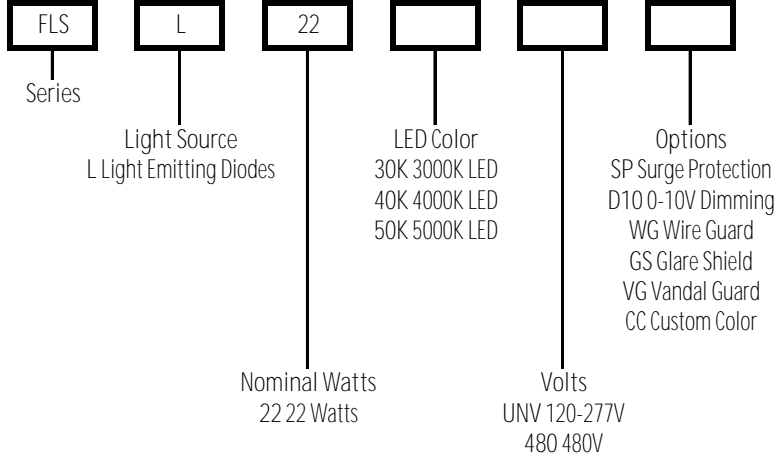

**SPECIFICATIONS**



**OPTIONS/ACCESSORIES**




WG Wire Guard



GS Glare Shield



VG Vandal Guard



Specifications Subject to Change

