



RSC LED Series

**SPECIFICATIONS**

- Die Cast Aluminum Housing
- Polycarbonate Lens
- White Finish
- CRI LED Engine
- Universal Volt LED Driver 120-277V
- 4K or 5K LED Color Options
- Optional Motion Sensing Control for Bi-Level Operation
- Optional Surge Protection
- Optional Dimming

**APPLICATIONS**

- Garage Area Lighting
- Retail Centers, Industrial Parks, Airports
- Schools, Commercial Buildings, Universities

**ELECTRICAL**

- 120-277V; 50/60Hz
- 40 Watts; 5,000 Lumens
- 60 Watts; 8,000 Lumens

**INSTALLATION**

- Surface Mount over Recessed Box or Pendant Mount (Conduit by Others)

**CERTIFICATIONS/LISTINGS**

- UL Listed
- IP65
- Listed for Wet Locations




PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_

QTY \_\_\_\_\_ NOTES \_\_\_\_\_ APPROVAL \_\_\_\_\_


**ORDERING/SPECIFYING INFORMATION:**

EXAMPLE: RSC L 40 50K UNV

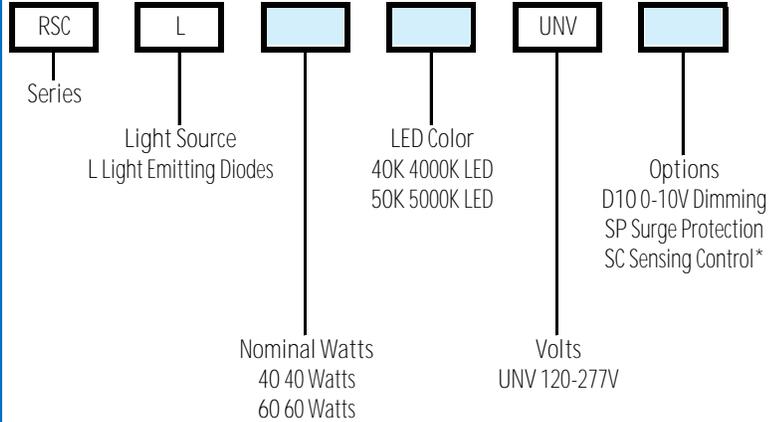

\*Up to 15 Feet Mounting

**SPECIFICATIONS**

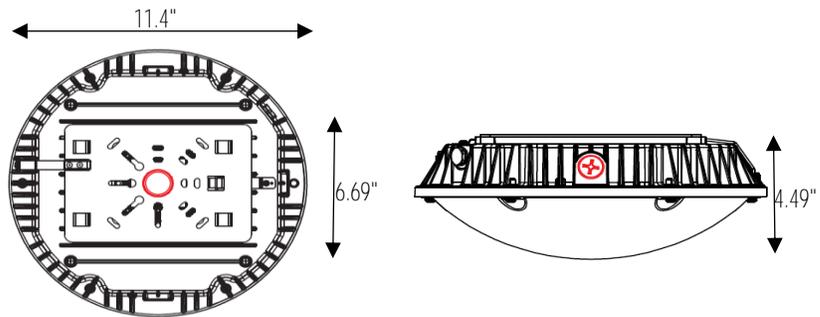

**OPTIONS/ACCESSORIES**

Specifications Subject to Change

