



ELO LED Series

**SPECIFICATIONS**

- Die Cast Aluminum Vandal-Resistant Housing
- U-V Resistant Prismatic Polycarbonate Opal Lens
- Mirrored Reflector
- Bronze or White Powder Coat Finish
- CRI LEDs
- Universal Volt LED Driver 120-277V
- 5K LED Color
- ADA Compliant
- Integrated Photocell Included
- Internal Surge Protection Included
- Optional Dimming

**APPLICATIONS**

- General Area Lighting
- Building Facade Lighting
- Schools, Commercial Buildings, Universities

**ELECTRICAL**

- 120-277V 50/60Hz
- 14 Watts; 1,192 Lumens

**INSTALLATION**

- Surface Mount Over Recessed Box

**CERTIFICATIONS/LISTINGS**

- ADA Compliant
- UL Listed
- IP65
- Listed for Wet Locations




PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_


QTY \_\_\_\_\_ NOTES \_\_\_\_\_ APPROVAL \_\_\_\_\_

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: ELO L 14 50K UNV

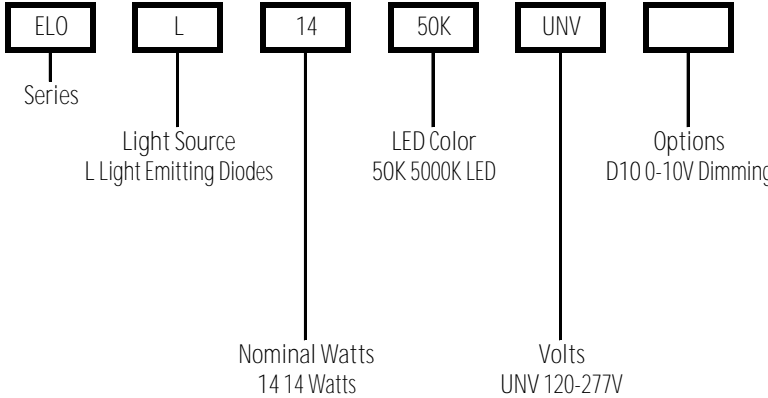

**SPECIFICATIONS**

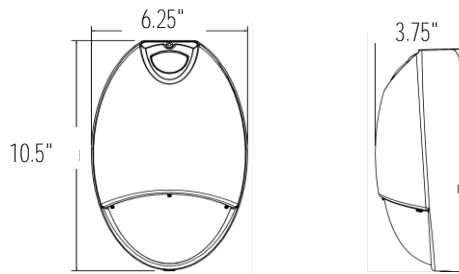

**OPTIONS/ACCESSORIES**

*Specifications Subject to Change*

