



ESG LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Grated Front Frame, Gasketed
- Polycarbonate Opal Lens
- Bronze or White Powder Coat Finish, Optional Custom Color
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V, Optional 480V
- 3K, 4K or 5K LED Color Options
- Optional Emergency Battery
- Optional Surge Protection
- Optional Dimming
- Optional Photocell

APPLICATIONS

- General Area Lighting
- Building Facade Lighting
- Schools, Commercial Buildings, Universities

ELECTRICAL

- 120-277V 50/60Hz
- Optional 480V 50/60Hz
- 23 Watts; 2,103 Lumens

INSTALLATION

- Surface Mount Over Recessed Box

CERTIFICATIONS/LISTINGS


- CSA Listed
- IP65
- Listed for Wet Locations



PROJECT _____ TYPE _____
 QTY _____ NOTES _____ APPROVAL _____


ORDERING/SPECIFYING INFORMATION:

EXAMPLE: ESG L 23 50K UNV BZ

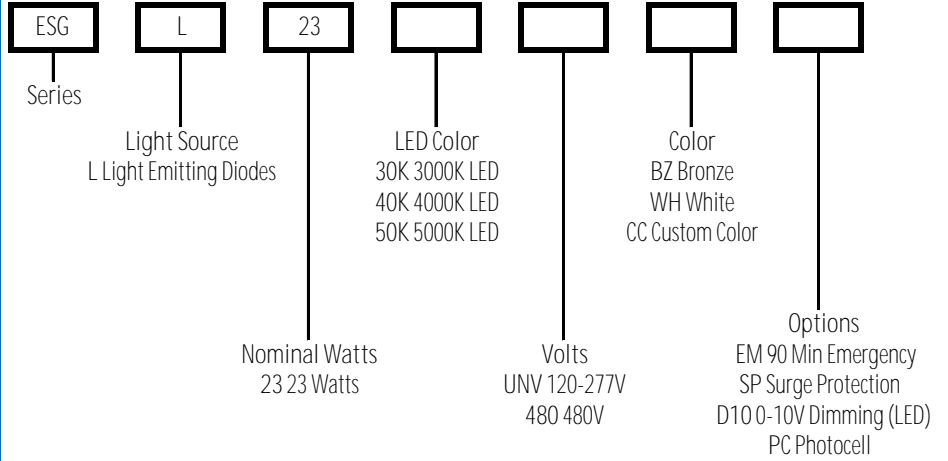

*Up to 20 Feet Mounting

SPECIFICATIONS

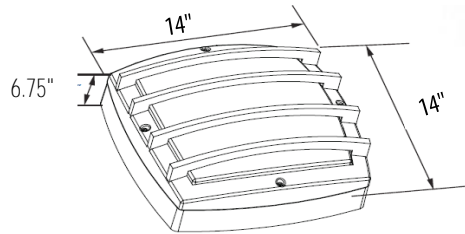

OPTIONS/ACCESSORIES

Specifications Subject to Change

