

ESO Series

Encore Square Open Frame Wall Light



ESO Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Open Front Frame, Gasketed
- Polycarbonate Opal Lens
- White Powder Coat Steel Reflector
- Bronze or White Powder Coat Finish Optional Custom Color
- CF Plug-In Type, GX24Q (Non LED)
- Multiple Light Source Options
- Universal Volt LED Driver with Optional Dimming
- 3K, 4K or 5K LED Color Options
- Optional Emergency Battery
- Optional Surge Protection
- Optional Photocell

APPLICATIONS

- General Area Lighting
- Building Facade Lighting
- Schools, Commercial Buildings, Universities

ELECTRICAL

- 120-277V 50/60Hz
- Optional 480V 50/60Hz (LED)

INSTALLATION

- Surface Mount Over Recessed Box

CERTIFICATIONS/LISTINGS

- CSA Listed
- Listed for Wet Locations

**ALL-SITE
LIGHTING**

PROJECT _____ TYPE _____

QTY _____ NOTES _____ APPROVAL _____


ORDERING/SPECIFYING INFORMATION:

EXAMPLE: ESO F 52 UNV BZ

ESO						
Series	Light Source F Compact Fluorescent L Light Emitting Diodes	Watts 2CF LED 52 23 64 84	LED Color ___ Non LED 30K 3000K LED 40K 4000K LED 50K 5000K LED	Volts UNV 120-277V 480 480V	Color BZ Bronze WH White CC Custom Color	Options L Lamped EM 90 Min Battery SP Surge Protection D10 0-10V Dimming (LED) PC Photocell

*Up to 20 Feet Mounting

SPECIFICATIONS

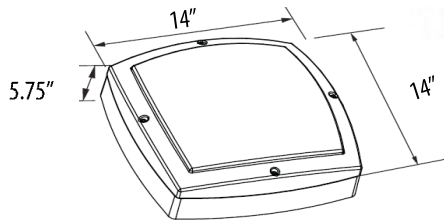

OPTIONS/ACCESSORIES

Specifications Subject to Change

**AMERICA
LIGHT**