

GRG LED Series

Genesis LED Large Round Grated Wall Sconce



GRG LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Grated Front Frame
- Clear or Frosted Molded Borosilicate Glass Lens
- Bronze, White or Black Powder Coat Finish, Optional Custom Color
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V, Optional 480V
- 3K, 4K or 5K LED Color Options
- Optional Motion Sensing Control for Bi-Level Operation
- Optional Emergency Battery
- Optional Surge Protection
- Optional Dimming
- Optional Photocell

APPLICATIONS

- General Area Lighting
- Building Facade Lighting
- Schools, Commercial Buildings, Universities

ELECTRICAL

- 120-277V 50/60Hz
- Optional 480V 50/60Hz
- 23 Watts; 3,005 Lumens

INSTALLATION

- Mounts Over Recessed Box or Surface Conduit

CERTIFICATIONS/LISTINGS

- CSA Listed
- IP65
- Listed for Wet Locations




PROJECT _____ TYPE _____

QTY _____ NOTES _____ APPROVAL _____


ORDERING/SPECIFYING INFORMATION:

EXAMPLE: GRG L 23 50K UNV BZ

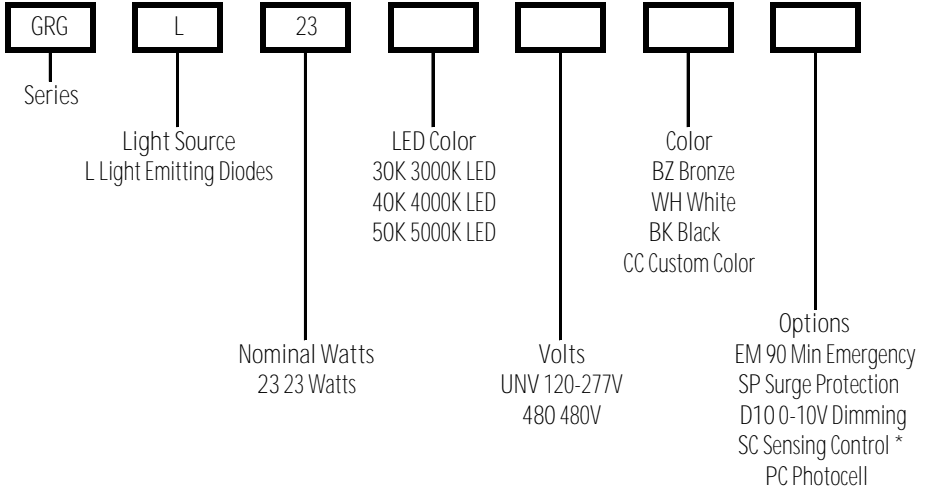

* Up to 15 Feet Mounting

SPECIFICATIONS

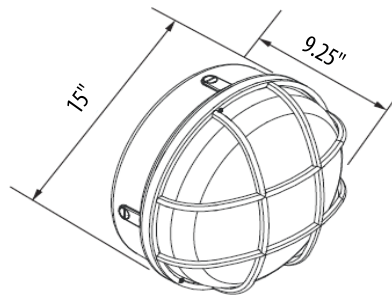

OPTIONS/ACCESSORIES

Specifications Subject to Change

