

PAM LED Series

Medium LED Parking and Area Light



PAM LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Tempered Flat Clear Glass Lens
- Bronze Powder Coat Finish, Optional Custom Color
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V, Optional 480V
- 3K, 4K or 5K LED Color Options
- Twist-Lock Photocell Included
- Integral Heat Sinking
- Choice of Light Distributions
- Optional Surge Protection
- Optional Dimming
- Optional Wire Guard
- Optional House Side Shield

APPLICATIONS

- General Area Lighting
- Parking, Roadway, Area
- Schools, Commercial Buildings, Communities

ELECTRICAL

- 120-277V 50/60Hz
- Optional 480V 50/60Hz
- 167 Watts; 17,092 Lumens

INSTALLATION

- Mounts with 90° Slip Fitter, Adjustable Slip Fitter or U-Bracket.

CERTIFICATIONS/LISTINGS


- CSA Listed
- IP66
- Listed for Wet Locations

PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: PAM L 167 T3 40K UNV

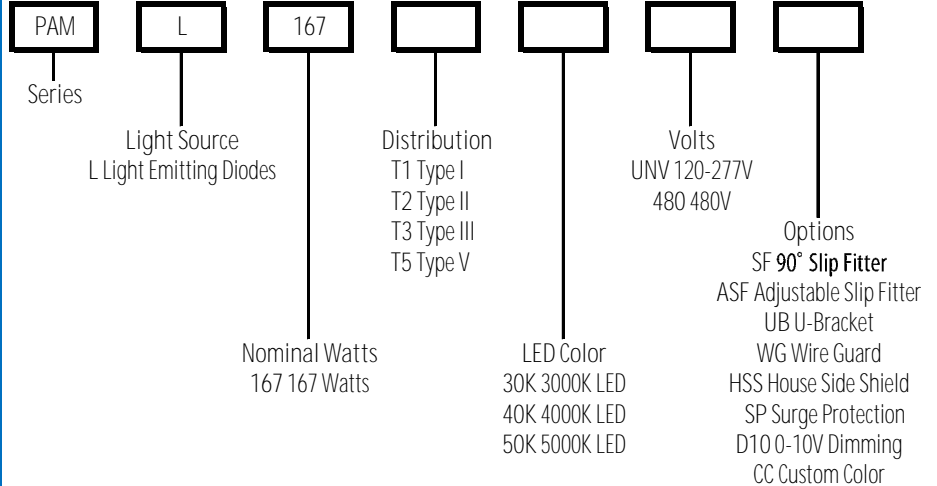

SPECIFICATIONS

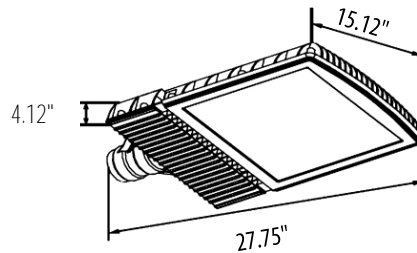


OPTIONS/ACCESSORIES




SF 90° Slip Fitter




ASF Adjustable Slip Fitter



UB U-Bracket



WG Wire Guard



HSS House Side Shield



Specifications Subject to Change

