

WSRC Series

Round Crescent Wall Sconce



WSRC Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Tempered Clear Flat Glass Lens
- Full Cut Off Front Frame
- Aluminium Reflector (Non LED)
- Bronze Powder Coat Finish, Optional Custom Color
- HID Porcelain Medium Base 4KV Socket or CF Plug In Type, GX24Q (Non LED)
- Multiple Light Source Options
- 3K, 4K or 5K LED Color Options
- Universal Volt LED Driver with Optional Dimming
- Optional Emergency Battery (CF/LED)
- Optional Surge Protection

APPLICATIONS

- General Area Lighting
- Building Facade Lighting
- Schools, Commercial Buildings, Universities

ELECTRICAL

- 120V 50/60Hz: HPS 35W, 50W, 70W, 100W & 150W
- 120-277V 50/60Hz: CF 26W, 32W, 42W, 52W, 64W & 84W & LED 47W
- 120/208/240/277V 50/60Hz: HPS or MH 50W, 70W, 100W & 150W
- 480V 50/60Hz: LED 47W

INSTALLATION

- Surface Mount Over Recessed Box

CERTIFICATIONS/LISTINGS

- CSA Listed
- Dark Sky Compliant
- Listed for Wet Locations

**ALL-SITE
LIGHTING**

PROJECT _____ TYPE _____

QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: WSRC M 100 Q L



Series

Light Source

- H High Pressure Sodium
- M Metal Halide
- F Compact Fluorescent
- L Light Emitting Diodes

LED Color

- ___ Non LED
- 30K 3000K LED
- 40K 4000K LED
- 50K 5000K LED

Options

- L Lamped
- EM 90 Min Battery (CF/LED)
- SP Surge Protection
- D10 0-10V Dimming (LED)
- CC Custom Color


Watts

HPS	MH	CF	2CF	LED
35	50	26	52	47
50	70	32	64	
70	100	42	84	
100	150			
150				

Volts

120	120V
UNV	120-277V
Q120/208/240/277V	
480	480V

SPECIFICATIONS

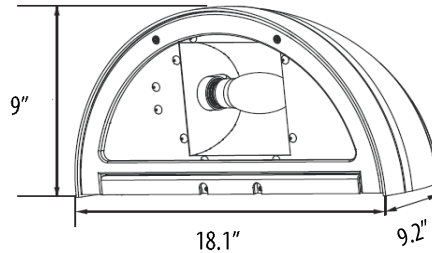

OPTIONS/ACCESSORIES

Specifications Subject to Change

