

CVR Series

Canopy Vandal Round



CVR Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Clear Prismatic Polycarbonate Lens
- White Powder Coat Steel Reflector
- Bronze Powder Coat Finish, Optional Custom Color
- HID Porcelain Medium Base 4KV Socket or CF Plug-In Type, GX24Q (Non LED)
- Stainless Steel Hardware
- Multiple Light Source Options
- 3K, 4K or 5K LED Color Options
- Universal Volt LED Driver with Optional Dimming
- Optional Emergency Battery (CF/LED)
- Optional Photocell
- Optional Surge Protection

APPLICATIONS

- General Area/Garage Lighting
- Platforms, Walkways, Parking, Tunnels
- Schools and Commercial Buildings

ELECTRICAL

- 120-277V: LED 54W & CF 52W, 64W & 84W
- 120V: HPS 50W, 70W, 100W & 150W
- Quad Volt: HPS & MH 50W, 70W, 100W & 150W
- 480V: LED 54W, HPS & MH 100W & 150W

INSTALLATION

- Mounts Over Recessed Box or with Surface Conduit

CERTIFICATIONS/LISTINGS

- CSA Listed
- Listed for Wet Locations

**ALL-SITE
LIGHTING**

PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: CVR M 150 Q L

CVR					
Series	Light Source	LED Color	Options	Watts	Volts
M Metal Halide	H High Pressure Sodium	30K 3000K LED	L Lamped	MH HPS 2CF LED	120 120V
F Compact Fluorescent	L Light Emitting Diodes	40K 4000K LED	PC Photocell	70 70 64	UNV 120-277V
		50K 5000K LED	EM 90 Min Battery (CF/LED)	100 100 84	Q 120/208/240/277V
			D10 0-10V Dimming (LED)	150 150	480 480V
			SP Surge Protection		
			CC Custom Color		

SPECIFICATIONS

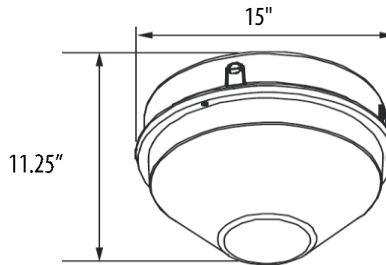

OPTIONS/ACCESSORIES

Specifications Subject to Change

