



**CVS8 Series**

**SPECIFICATIONS**

- Die Cast Aluminum Housing
- Clear Prismatic Polycarbonate Lens
- White Powder Coat Steel Reflector
- Bronze Powder Coat Finish, Optional Custom Color
- Stainless Steel Hardware
- HID Porcelain Medium Base 4KV Socket or CF Plug-In Type GX24Q (Non LED)
- Multiple Light Source Options
- 3K, 4K or 5K LED Color Options
- Universal Volt LED Driver 120-277V
- Optional Photocell

**APPLICATIONS**

- General Area/Garage Lighting
- Platforms, Walkways, Parking, Tunnels
- Schools and Commercial Buildings

**ELECTRICAL**

- 120-277V: LED 23W & CF 26W, 32W & 42W
- 120V: HPS 35W, 50W & 70W
- Quad Volt: HPS & MH 50W & 70W
- 480V: LED 23W

**INSTALLATION**

- Mounts Over Recessed Box or with Surface Conduit

**CERTIFICATIONS/LISTINGS**

- CSA Listed
- Listed for Wet Locations




PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_


QTY \_\_\_\_\_ NOTES \_\_\_\_\_ APPROVAL \_\_\_\_\_

**ORDERING/SPECIFYING INFORMATION:**

**EXAMPLE:** CVS8 M 50 Q L

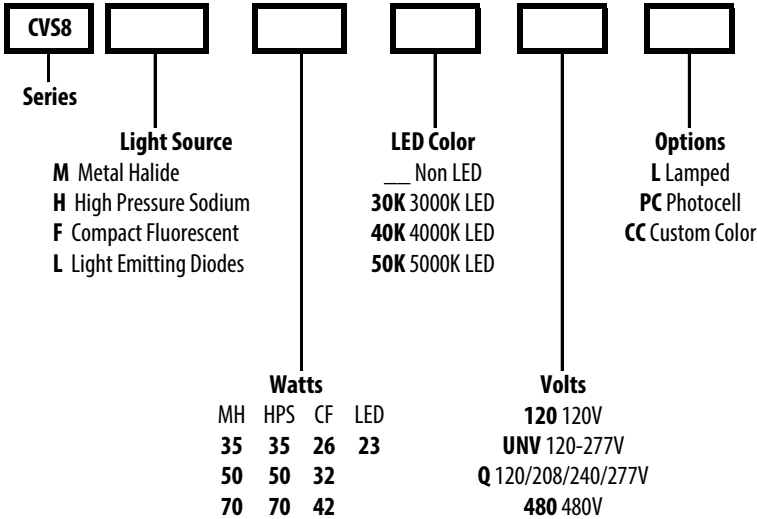

**SPECIFICATIONS**

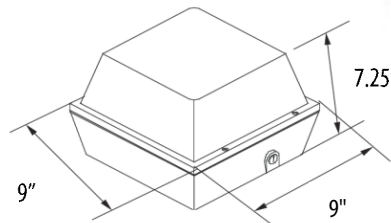

**OPTIONS/ACCESSORIES**

*Specifications Subject to Change*

