



EMM WP Series

SPECIFICATIONS

- Injection Molded Thermoplastic Housing
- Adjustable Glare Free Lighting Heads
- Push to Test Switch
- LED Charge Indicator
- Ni-Cad Premium Battery 3.6V
- Dual Voltage 120/277V
- White Finish

APPLICATIONS

- General Emergency Lighting
- Offices, Warehouses, Walkways, Garages
- Wall or Ceiling Mount
- Suitable for Wet Locations

ELECTRICAL

- 120/277V; 60Hz
- 90 Minute Emergency Operation

INSTALLATION

- Surface Mount over Surface or Recessed J-Box

CERTIFICATIONS/LISTINGS

- UL Listed
- Listed for Wet Locations




PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: EMM W WP

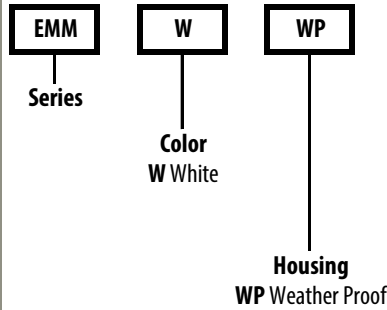

SPECIFICATIONS

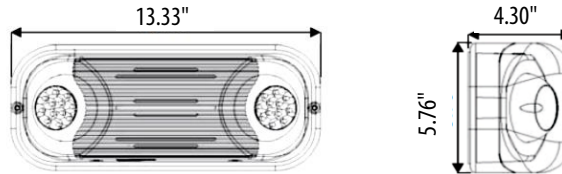

OPTIONS/ACC

Specifications Subject to Change

