



EXCOM Series

SPECIFICATIONS

- Injection Molded Thermoplastic Housing
- Adjustable Glare Free Lighting Heads
- Push to Test Switch
- Ni-Cad Premium Battery
- Snap In/Out Chevron Direction Indicators
- Single Face or Double Face (Blank Included)
- LED Light Source for both Exit and Heads
- Dual Voltage 120/277V
- Ceiling or Wall Mount

APPLICATIONS

- General Emergency Lighting
- Offices, Warehouses, Walkways, Garages
- Wall or Ceiling Mount
- Suitable for Outside Covered Applications

ELECTRICAL

- 120/277V; 60Hz
- 90 Minute Emergency Operation

INSTALLATION

- Ceiling or Wall Mount

CERTIFICATIONS/LISTINGS

- UL Listed
- Listed for Damp Locations




PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:


EXAMPLE: EXCOM W R

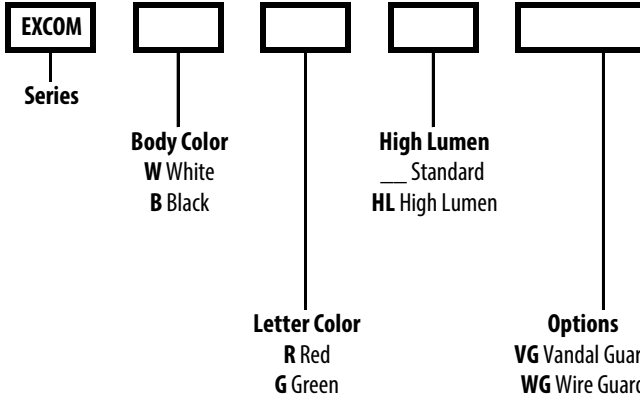

SPECIFICATIONS

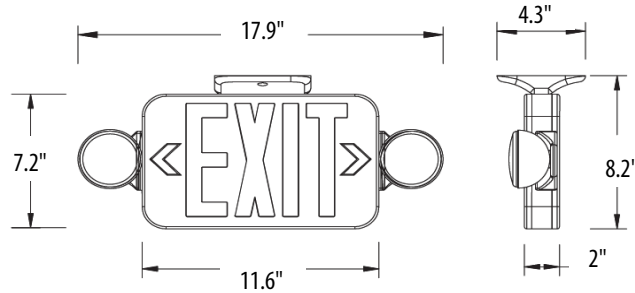

OPTIONS/ACCESSORIES

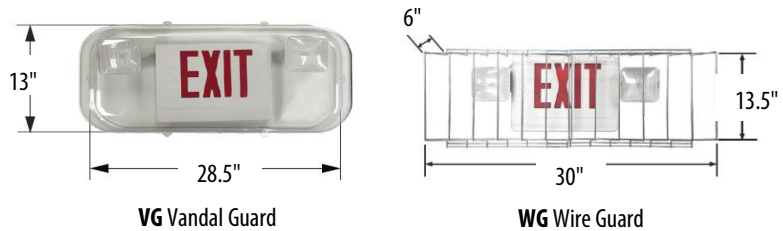

Specifications Subject to Change

