

FLR Series

Round Back Flood



FLR Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Tempered Clear Flat Glass Lens
- Aluminum Reflector (Non LED)
- Uniformed Poured Silicone Gasket
- Bronze Powder Coat Finish, Optional Custom Color
- HID Porcelain Medium Base 4KV Socket or CF Plug-In Type, GX24Q (Non LED)
- Stainless Steel Hardware
- Multiple Light Source Options
- 3K, 4K or 5K LED Color Options
- Universal Volt LED Driver with Optional Dimming
- Optional Surge Protection
- Optional Wire Guard, Glare Shield or Vandal Guard

APPLICATIONS

- General Area/Flood Lighting
- Walkways, Parking, Roadway, Area
- Schools, Commercial Buildings, Communities
- Street Lighting, Car Lots, Campuses

ELECTRICAL

- 120V: HPS 35W, 50W, 70W, 100W & 150W
- UNV: CF 26W, 32W, & 42W & LED 40W
- Quad Volt: HPS & MH 50W, 70W, 100W & 150W
- 480V: LED 40W, HPS & MH 100W & 150W

INSTALLATION

- Mounts with 1/2" Threaded Knuckle or Optional Adjustable Slip Fitter

CERTIFICATIONS/LISTINGS

- CSA Listed
- Listed for Wet Locations

**ALL-SITE
LIGHTING**

PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:


EXAMPLE: FLR M 100 Q L

FLR					
Series	Light Source	LED Color		Options	
	H High Pressure Sodium M Metal Halide F Compact Fluorescent L Light Emitting Diodes	___ Non LED 30K 3000K LED 40K 4000K LED 50K 5000K LED		L Lamped ASF Adjustable Slip Fitter SP Surge Protection D10 0-10V Dimming (LED) WG Wire Guard GS Glare Shield VG Vandal Guard CC Custom Color	
	Watts			Volts	
	HPS	MH	CF	LED	
	35	50	26	40	120 120V
	50	70	32		UNV 120-277V
	70	100	42		Q 120/208/240/277V
	100	150			480 480V
	150				


SPECIFICATIONS

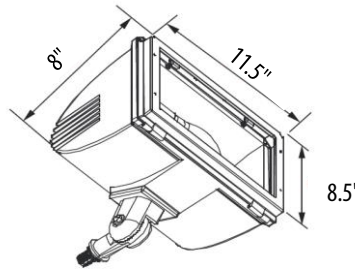


OPTIONS/ACCESSORIES




ASF Adjustable Slip Fitter



WG Wire Guard



GS Glare Shield



VG Vandal Guard



Specifications Subject to Change

**AMERICA
LIGHT**