



ASL LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing with Top Glare Shield
- Gray Powder Coat Finish, Optional Custom Color
- UV Stabilized Polycarbonate Lens, 4 Lenses per Fixture with Closed Cell Gasketing
- CRI LED Aluminum Substrate Board
- Universal Volt Electronic Driver, Optional 480V
- 4K or 5K LED Color Options
- Intergral Heat Sinking
- Various Beam Spreads
- Stainless Steel Hardware
- Includes a 36" Cord & Liquid Tight Connector to Allow Installation without Opening the Housing
- Optional Dimming
- Optional Tenon Adaptor

APPLICATIONS

- General Area Lighting
- Car Lots, Ball Parks, Sports Arena
- Tennis Courts, Outdoor Stadiums

ELECTRICAL

- 120-277V 50/60Hz
- Optional 480V 50/60Hz
- 268 Watts; 30,323 Lumens; 2x2 Beam 19°x15°
- 268 Watts; 31,283 Lumens; 3x3 Beam 21°x21°
- 268 Watts; 32,799 Lumens; 4x4 Beam 28°x27°
- 268 Watts; 39,942 Lumens; 5x5 Beam 34°x33°
- 536 Watts; 61,442 Lumens; 2x2 Beam 19°x15°
- 536 Watts; 61,893 Lumens; 3x3 Beam 16°x16°
- 536 Watts; 64,973 Lumens; 4x4 Beam 31°x31°
- 536 Watts; 63,972 Lumens; 5x5 Beam 38°x39°

INSTALLATION

- Adjustable Yoke Mount, Optional Tenon Adaptor

CERTIFICATIONS/LISTINGS

- CSA Listed
- IP66
- Listed for Wet Locations




PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: ASL L 268 3X3 40K UNV

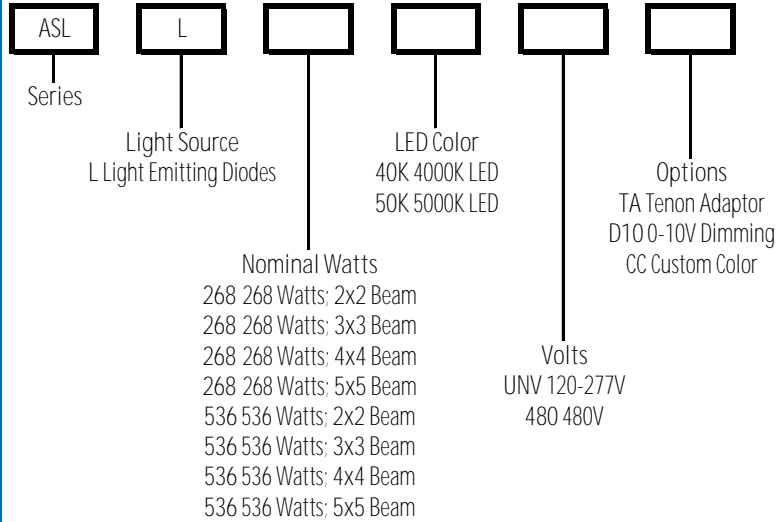

SPECIFICATIONS



OPTIONS/ACCESSORIES

TA Tenon Adaptor



2 3/8

Specifications Subject to Change

