

# BFR Amber LED Series

# LED Round Flat Bollard with Cone Reflector Amber



BFR Amber LED Series

### SPECIFICATIONS

- Extruded Aluminum Housing
- Die Cast Aluminum Base and Top
- Internal Cone Reflector
- Clear Polycarbonate Lens
- Bronze, White or Black Powder Coat Finish, Optional Custom Color
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V, Optional 480V
- Monochromatic Amber LED Light
- Turtle Friendly, LEDs Operates Between 585 Nanometers and 595 Nanometers
- Optional House Side Shield
- Optional Surge Protection
- Optional Dimming
- Optional Emergency Battery Pack
- 50,000 Hour Life with 3 Year LED Warranty

### APPLICATIONS

- General Area/Pathway Lighting
- Entries, Walkways, Pathways, Area
- Schools, Hospitals, Office, Commercial Buildings
- Ingress/Egress, Campuses

### ELECTRICAL

- 120-277V; 50/60Hz
- Optional 480V; 50/60Hz
- 15 Watts; 360 Lumens

### INSTALLATION

- Bolt to Concrete Base or Use Direct Bury Base Option

### CERTIFICATIONS/LISTINGS

- CSA Listed
- IP65
- Listed for Wet Locations



PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_

QTY \_\_\_\_\_ NOTES \_\_\_\_\_ APPROVAL \_\_\_\_\_

### ORDERING/SPECIFYING INFORMATION:



Series

Light Source  
L Light Emitting Diodes

Watts  
15 15 Watts

LED Color  
TFL Turtle LED



Volts  
UNV 120-277V  
480 480V

Color  
BZ Bronze  
WH White  
BK Black  
CC Custom Color

Options


HSS House Side Shield  
DBB Direct Bury Base  
AB Anchor Bolts  
\_\_\_ " Custom Height 18"-36"  
SP Surge Protection  
D10 0-10V Dimming  
EM 90 Min Emergency Pack

EXAMPLE: BFR L 15 TFL UNV BZ

### SPECIFICATIONS



DBB Direct Bury Base

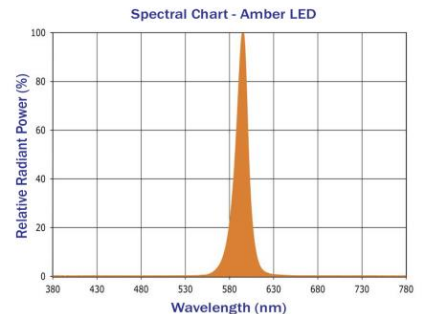

### OPTIONS/ACCESSORIES



AB Anchor Bolts



HSS House Side Shield



Specifications Subject to Change