

BG Series

Round Dome Top Bollard with Glass Diffuser



BG Series

SPECIFICATIONS

- Extruded Aluminum Housing
- Die Cast Aluminum Base and Top
- Prismatic Borosilicate Glass Refractor
- Clear Polycarbonate Lens
- Bronze, White or Black Powder Coat Finish, Optional Custom Color
- Hid Porcelain Medium Base 4KV Socket or CF Plug-In Type, GX24Q (Non LED)
- Stainless Steel Hardware
- Multiple Light Source Options
- Various Wattages Available
- 3K, 4K, 5K or Turtle LED Color Options
- Optional House Side Shield
- Optional Surge Protection
- Optional Type III Glass Refractor

APPLICATIONS

- General Area/Pathway Lighting
- Entries, Walkways, Pathways, Area
- Schools, Hospitals, Offices, Commercial Buildings
- Ingress/Egress, Campuses

ELECTRICAL

- 120-277V: 50/60Hz: LED 15W & CF 42W & 57W
- Quad: MH & HPS 50W, 70W & 100W
- 480V: MH & HPS 70W & 100W & LED 15W
- 120V: HPS 35W, 50W, 70W & 100W

INSTALLATION

- Bolt to Concrete Base or Use Direct Bury Option

CERTIFICATIONS/LISTINGS

- CSA Listed
- Listed for Wet Locations





PROJECT _____ TYPE _____

QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION: EXAMPLE: BG M 100 Q BZ L

BG	[]	[]	[]	[]	[]	[]
Series	Light Source M Metal Halide H High Pressure Sodium F Compact Fluorescent L Light Emitting Diodes	LED Color ___ Non LED 30K 3000K LED 40K 4000K LED 50K 5000K LED TFL Turtle LED	Watts MH HPS CF LED 50 35 42 15 70 50 57 100 70 100	Volts UNV 120-277V Q 120/208/240/277V 480 480V 120 120V	Color BZ Bronze WH White BK Black CC Custom Color	Options No Lamp L Lamped HSS House Side Shield DBB Direct Bury Base AB Anchor Bolts " Custom Height 18"-36" SP Surge Protection T3G Type III Glass Refractor

SPECIFICATIONS

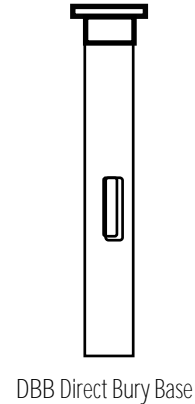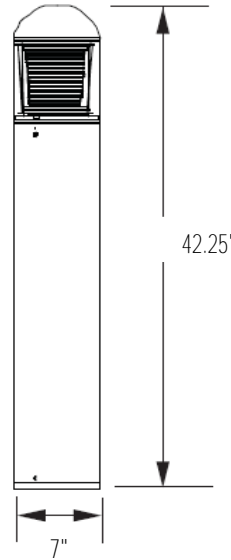

OPTIONS/ACCESSORIES



AB Anchor Bolts



HSS House Side Shield



T3G Type III Glass



Specifications Subject to Change