



FLL LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Tempered Clear Flat Glass Lens
- Bronze Powder Coat Finish, Optional Custom Color
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V, Optional 480V
- 3K, 4K or 5K LED Color Options
- Optional Surge Protection
- Optional Dimming
- Optional Wire Guard, Glare Shield or Vandal Guard

APPLICATIONS

- General Area/Flood Lighting
- Walkways, Parking, Roadway, Area
- Schools, Commercial Buildings, Communities
- Street Lighting, Car Lots, Campuses

ELECTRICAL

- 120-277V; 50/60Hz
- Optional 480V; 50/60Hz
- 77 Watts; 8,257 Lumens

INSTALLATION

- Mounts with 6" Mounting Arm (Round or Square) or 10" Arm for Direct Pole Mount, Adjustable Slip Fitter, U-Bracket or Large Yoke

CERTIFICATIONS/LISTINGS

- CSA Listed
- IP65
- Listed for Wet Locations




PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:


EXAMPLE: FLL L 77 40K UNV

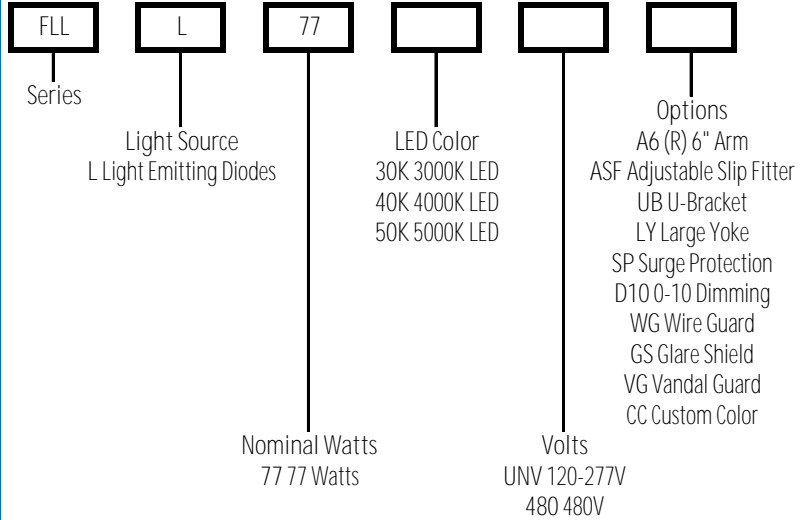

SPECIFICATIONS

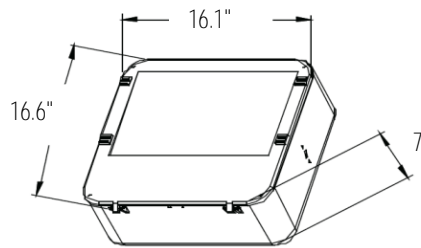

OPTIONS/ACCESSORIES




A6 (R) 6" Arm



ASF Adjustable Slip Fitter



UB U-Bracket



LY Large Yoke




WG Wire Guard



GS Glare Shield



VG Vandal Guard



Specifications Subject to Change

