



VT LED Series

**SPECIFICATIONS**

- Polycarbonate Housing
- White Polycarbonate Lens
- Uniform Poured Silicone Gasket
- CRI LED Light Engine
- Universal Volt LED Driver 120-277V
- 4K or 5K LED Color Options
- Stainless Steel Door Clips Included
- Standard V-Hooks Included for Hanging
- Multiple Knockouts for Pendant or Conduit
- Optional Emergency Battery
- Optional Motion Sensor or Sensing Control
- Optional Dimming

**APPLICATIONS**

- General Area Lighting
- Parking Garages, Industrial Facilities, Stairwells
- Schools, Canopies, Warehouses and Walkways

**ELECTRICAL**

- 120-277V; 50/60Hz
- 40 Watts; 4,400 Lumens; 4000K
- 40 Watts; 4,500 Lumens; 5000K
- 52 Watts; 6,760 Lumens; 4000K
- 52 Watts; 6,800 Lumens; 5000K
- 65 Watts; 7,150 Lumens; 4000K
- 65 Watts; 7,500 Lumens; 5000K

**INSTALLATION**

- Surface Mount over Recessed Box or Pendant Mount (Conduit by Others)

**CERTIFICATIONS/LISTINGS**

- UL Listed
- IP65
- Listed for Wet Locations




PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_

QTY \_\_\_\_\_ NOTES \_\_\_\_\_ APPROVAL \_\_\_\_\_

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: VT L 40 40K UNV

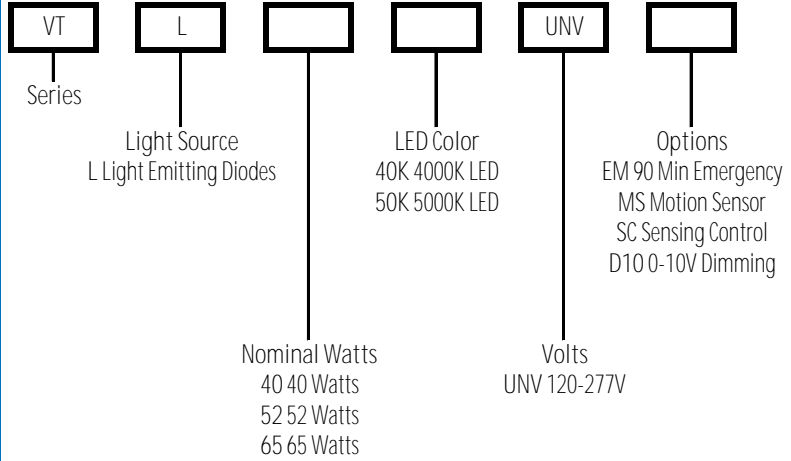

**SPECIFICATIONS**



**OPTIONS/ACCESSORIES**

Specifications Subject to Change

