

WFS Amber LED Series

LED Small Full Cut Off Wall Pack Amber



WFS Amber LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Tempered Clear Flat Glass Lens
- Full Cut Off Front Frame
- Bronze Powder Coat Finish, Optional Custom Color
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V, Optional 480V
- Monochromatic Amber LED Light
- Turtle Friendly, LEDs Operates Between 585 Nanometers and 595 Nanometers
- Stainless Steel Hardware
- Skylight Friendly
- Optional Emergency Battery
- Optional Surge Protection
- Optional Dimming
- Optional Photocell

APPLICATIONS

- General Area, Facade Lighting, Entry Lighting
- Platforms, Walkways, Parking, Tunnels
- Schools and Universities
- Commercial, Warehouse, Industrial Facilities

ELECTRICAL

- 120-277V; 50/60Hz
- Optional 480V; 50/60Hz
- 22 Watts; 794 Lumens

INSTALLATION

- Mounts Over Recessed Box or with Surface Conduit

CERTIFICATIONS/LISTINGS

- CSA Listed
- IP55
- Listed for Wet Locations



PROJECT _____ TYPE _____

QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: WFS L 22 TFL UNV



Series

L

Light Source
L Light Emitting Diodes

22

Nominal Watts
22 22 Watts

TFL

LED Color
TFL Turtle LED




UNV

Volts
UNV 120-277V
480 480V


Options

EM 90 Min Battery
SP Surge Protection
D10 0-10V Dimming
PC Photocell
CC Custom Color

SPECIFICATIONS

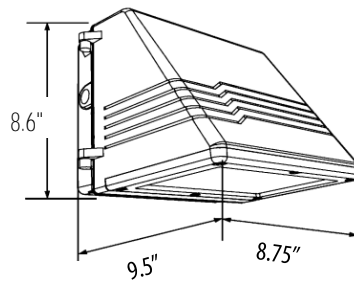

Spectral Chart - Amber LED

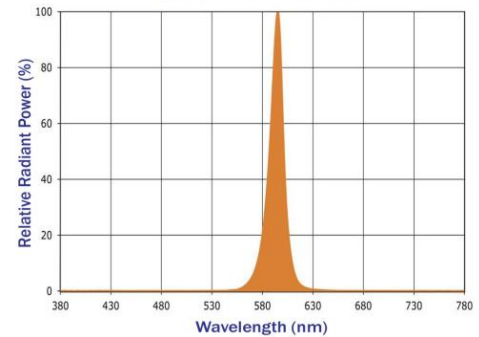

OPTIONS/ACCESSORIES

Specifications Subject to Change

