



FLH LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Tempered Clear Flat Glass Lens
- Bronze Powder Coat Finish, Optional Custom Color
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V, Optional 480V
- 3K, 4K or 5K LED Color Options
- Optional Surge Protection
- Optional Dimming
- Optional Wire Guard, Glare Shield or Vandal Guard

APPLICATIONS

- General Area/Flood Lighting
- Walkways, Parking, Roadway, Area
- Schools, Commercial Buildings, Communities
- Street Lighting, Car Lots, Campuses

ELECTRICAL

- 120-277V; 50/60Hz
- Optional 480V; 50/60Hz
- 68 Watts; 7,401 Lumens

INSTALLATION

- Mounts with a U-Bracket, Adjustable Slip Fitter or Large Yoke

CERTIFICATIONS/LISTINGS

- CSA Listed
- IP65
- Listed for Wet Locations




PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:


EXAMPLE: FLH L 68 40K UNV

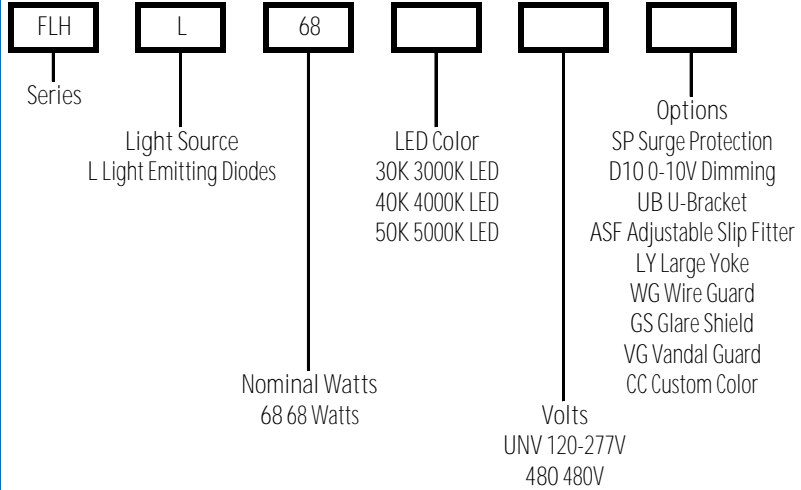


SPECIFICATIONS

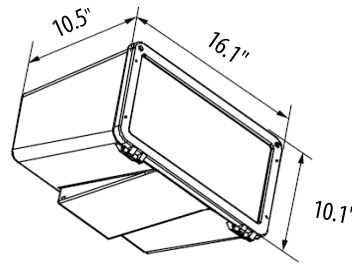


OPTIONS/ACCESSORIES



ASF Adjustable Slip Fitter



UB U-Bracket




LY Large Yoke



WG Wire Guard



GS Glare Shield



VG Vandal Guard



Specifications Subject to Change

