



ARS LED Series

**SPECIFICATIONS**

- Die Cast Aluminum Housing and Front Frame
- Tempered Clear Flat Glass Lens
- Bronze Powder Coat Finish, Optional Custom Color
- Universal Volt LED Driver 120-277V, Optional 480V
- CRI LED Aluminum Substrate Board
- 3K, 4K, 5K or Turtle Amber LED Color Options
- Integral Heat Sinking
- Choice of Light Distributions
- Optional Surge Protection
- Optional House Side Shield
- Optional Dimming

**APPLICATIONS**

- General Area/Pathway Lighting
- Entries, Walkways, Roadway, Area
- Schools, Hospitals, Office, Commercial Buildings

**ELECTRICAL**

- 120-277V 50/60Hz
- Optional 480V 50/60Hz
- 81 Watts; 8,436 Lumens (3K, 4K or 5K)
- 112 Watts; 11,697 Lumens (3K, 4K or 5K)
- 81 Watts; 2,607 Lumens (TFL Amber)
- 112 Watts; 3,100 Lumens (TFL Amber)

**INSTALLATION**

- Various Mounting Options (See Options)

**CERTIFICATIONS/LISTINGS**


- CSA Listed
- IP66
- Listed for Wet Locations




PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_  
 QTY \_\_\_\_\_ NOTES \_\_\_\_\_ APPROVAL \_\_\_\_\_

**ORDERING/SPECIFYING INFORMATION:**


EXAMPLE: ARS L 81 T3 40K UNV

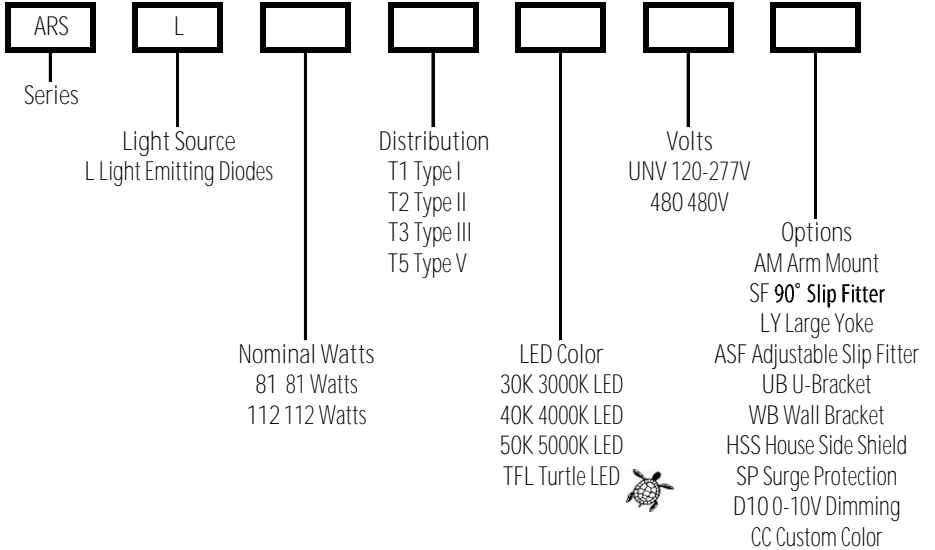

**SPECIFICATIONS**

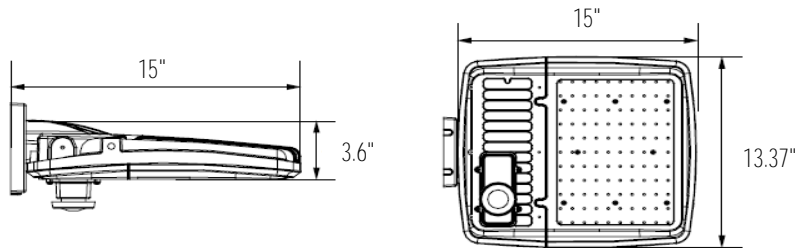

**OPTIONS/ACCESSORIES**

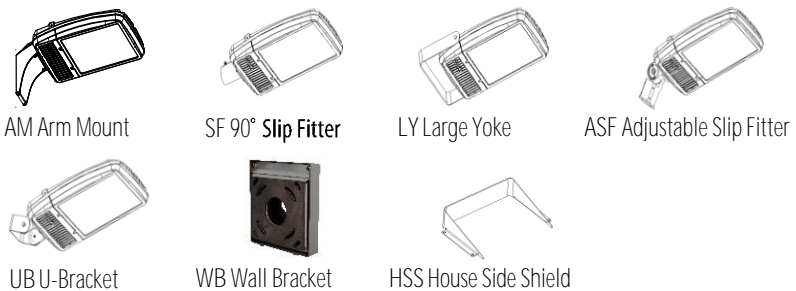

Specifications Subject to Change

