

# ARXL LED Series

# Aero Ray Extra Large LED Parking and Area



ARXL LED Series

### SPECIFICATIONS

- Die Cast Aluminum Housing and Front Frame
- Tempered Clear Flat Glass Lens
- Bronze Powder Coat Finish, Optional Custom Color
- Universal Volt LED Driver 120-277V, Optional 480V
- CRI LED Aluminum Substrate Board
- 3K, 4K or 5K LED Color Options
- Integral Heat Sinking
- Stainless Steel Hardware
- Choice of Light Distributions
- Optional House Side Shield
- Optional Wire Guard
- Optional Surge Protection
- Optional Dimming
- Optional Sensing Control for Bi-Level Operation

### APPLICATIONS

- General Area/Pathway Lighting/Car Lots
- Entries, Walkways, Roadway, Area
- Schools, Hospitals, Office, Commercial Buildings

### ELECTRICAL

- 120-277V 50/60Hz
- Optional 480V 50/60Hz
- 512 Watts; 63,835 Lumens (3K, 4K or 5K) Type I
- 512 Watts; 60,897 Lumens (3K, 4K or 5K) Type II
- 512 Watts; 66,898 Lumens (3K, 4K or 5K) Type III
- 512 Watts; 56,001 Lumens (3K, 4K or 5K) Type IV
- 512 Watts; 63,813 Lumens (3K, 4K or 5K) Type V

### INSTALLATION

- Mounts with a Slip Fitter, Installed at Factory

### CERTIFICATIONS/LISTINGS

- CSA Listed
- IP66
- Listed for Wet Locations




PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_


QTY \_\_\_\_\_ NOTES \_\_\_\_\_ APPROVAL \_\_\_\_\_

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: ARXL L 2 X 256 T4 40K UNV

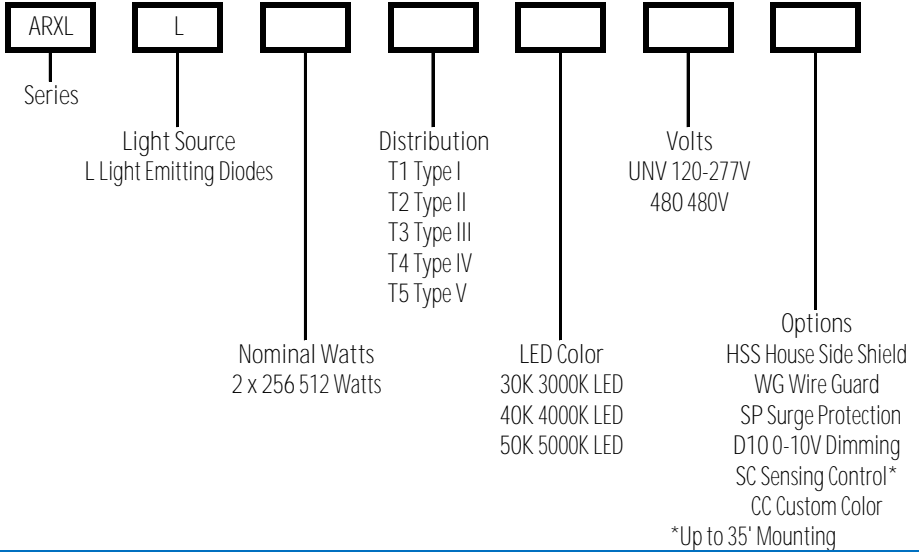

### SPECIFICATIONS

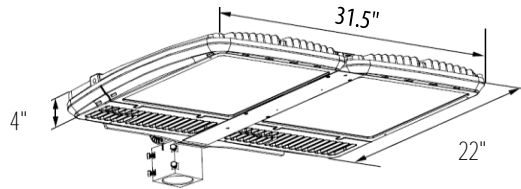

### OPTIONS/ACCESSORIES



Specifications Subject to Change

