

CWL Up/Down LED Series

LED Crescent Up/Down Wall Light



CWL Up/Down LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Tempered Clear Flat Glass Lens for Downlight, Molded Oval Shape Tempered Clear Lens for Uplight
- Bronze, White or Black Powder Coat Finish, Optional Custom Color
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V, Optional 480V
- 3K, 4K or 5K LED Color Options
- Optional Emergency Battery
- Optional Surge Protection
- Optional Dimming

APPLICATIONS

- General Area Lighting
- Building Facade Lighting
- Schools, Commercial Buildings, Universities

ELECTRICAL

- 120-277V 50/60Hz
- Optional 480V 50/60Hz
- 46 Watts; 5,922 Lumens

INSTALLATION

- Surface Mount Over Recessed Box

CERTIFICATIONS/LISTINGS

- CSA Listed
- IP65
- Listed for Wet Locations




PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: CWL L 46 40K UNV BZ

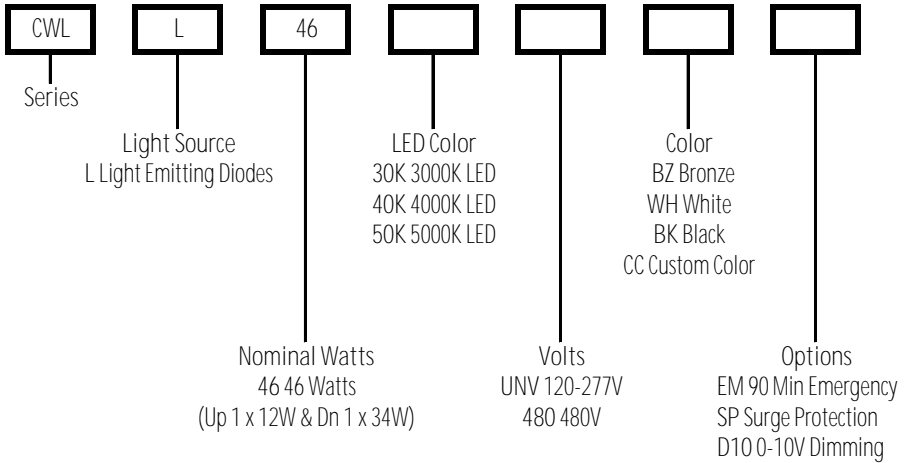

SPECIFICATIONS

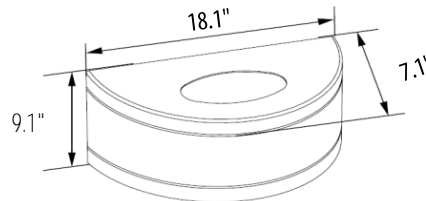

OPTIONS/ACCESSORIES

Specifications Subject to Change

