

# CWL Up/Down Series

# Crescent Up/Down Wall Light



CWL Up/Down Series

### SPECIFICATIONS

- Die Cast Aluminum Housing
- Tempered Clear Flat Glass Lens for Downlight, Molded Oval Shape Tempered Clear Lens for Uplight
- Aluminium Reflector (NonLED)
- Bronze, White or Black Powder Coat Finish, Optional Custom Color
- HID Porcelain Medium Base 4KV Socket or CF Plug-In Type, GX24Q (Non LED)
- Multiple Light Source Options
- Universal Volt LED Driver with Dimming
- 3K, 4K or 5K LED Color Options
- Optional Emergency Battery (CF/LED)

### APPLICATIONS

- General Area Lighting
- Building Facade Lighting
- Schools, Commercial Buildings, Universities

### ELECTRICAL

- 120V 50/60Hz: HPS 35W, 50W, 70W, 100W & 150W
- 120-277V 50/60Hz: CF 52W, 64W & 84W & LED 46W
- 120/208/240/277V 50/60Hz: HPS or MH 50W, 70W, 100W & 150W

### INSTALLATION

- Surface Mount Over Recessed Box

### CERTIFICATIONS/LISTINGS

- CSA Listed
- Listed for Wet Locations

**ALL-SITE  
LIGHTING**

PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_


QTY \_\_\_\_\_ NOTES \_\_\_\_\_ APPROVAL \_\_\_\_\_

### ORDERING/SPECIFYING INFORMATION:

EXAMPLE: CWL M 100 Q BZ

CWL							
Series	Light Source	Watts			Volts	Options	
	H High Pressure Sodium	HPS	MH	2CF	LED	L Lamped	
	M Metal Halide	35	50	52	46*	EM 90 Min Battery (CF/LED)	
	F Compact Fluorescent	50	70	64		D10 0-10V Dimming (CF/LED)	
	L Light Emitting Diodes	70	100	84			
		100	150				
		150					
		*34 Watt Down 12 Watt Up					

### SPECIFICATIONS

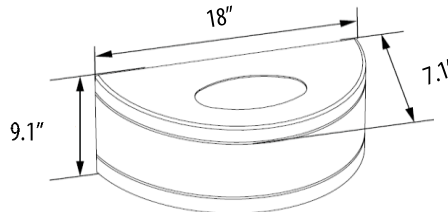

### OPTIONS/ACCESSORIES

Specifications Subject to Change

