

MAF LED Series

**SPECIFICATIONS**

- Die Cast Aluminum Housing
- Heat Resistant Polycarbonate Lens
- Bronze Powder Coat Finish, Optional Custom Color
- Modular LED Bars
- Universal Volt LED Driver 120-277V, Optional 480V
- 5K LED Color
- Type III Light Distribution
- Stainless Steel Hardware
- Multiple Mounting Options

**APPLICATIONS**

- General Area Lighting
- Parking, Roadway, Auto Dealerships, Signs
- Industrial Parks, Public Transportation, Airports
- Office Buildings, Medical Facilities, Communities

**ELECTRICAL**

- 120-277V; 50/60Hz
- 480V; 50/60Hz - 150W and 300W only
- 100 Watt; 13,000 Lumens, 1 Module
- 150 Watt; 19,500 Lumens, 2 Modules
- 300 Watt; 39,000 Lumens, 3 Modules

**INSTALLATION**

- Mounts with Arm Mount, Adjustable Slip Fitter or U-Bracket

**CERTIFICATIONS/LISTINGS**

- UL Listed
- IP65
- Listed for Wet Locations




PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_


QTY \_\_\_\_\_ NOTES \_\_\_\_\_ APPROVAL \_\_\_\_\_

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: MAF L 150 T3 50K UNV

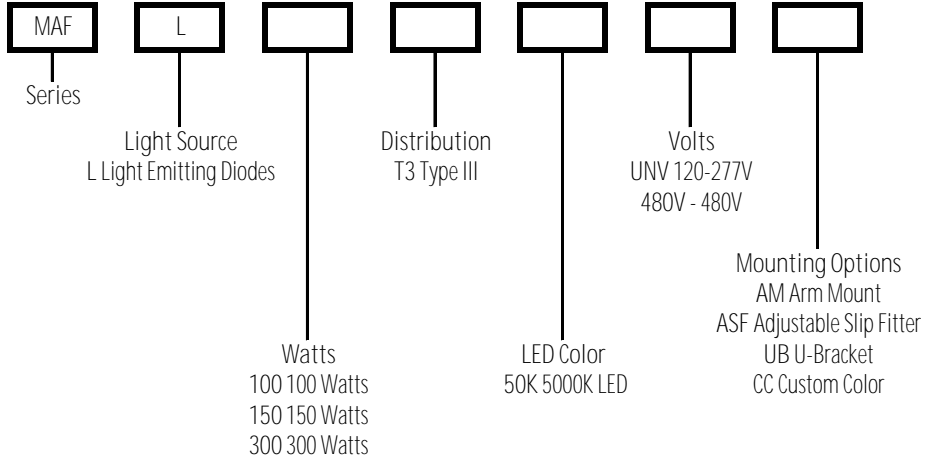

**SPECIFICATIONS**

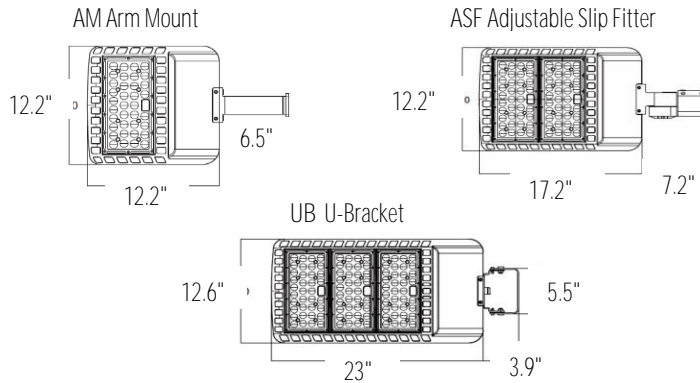

**OPTIONS/ACCESSORIES**



AM Arm Mount



ASF Adjustable Slip Fitter



UB U-Bracket

Specifications Subject to Change

