

ORH LED Series

Ovation LED Round Half Cut Off Wall Sconce



ORH LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Half Cut Off Front Frame, Gasketed
- Polycarbonate Opal Lens
- Bronze or White Powder Coat Finish, Optional Custom Color
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver with Optional Dimming
- 3K, 4K or 5K LED Color Options
- Stainless Steel Hardware
- Optional Motion Sensing Control for Bi-Level Operation
- Optional Emergency Battery
- Optional Surge Protection
- Optional Photocell

APPLICATIONS

- General Area Lighting
- Building Facade Lighting
- Schools, Commercial Buildings, Universities

ELECTRICAL

- 120-277V 50/60Hz
- 17 Watts; 1,935 Lumens

INSTALLATION

- Mounts Over Recessed Box or Surface Conduit

CERTIFICATIONS/LISTINGS

- CSA Listed
- IP66
- Listed for Wet Locations



PROJECT _____ TYPE _____

QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: ORH L 17 40K UNV BZ



ORH

L

17

[]

UNV

[]

[]

Series

Light Source
L Light Emitting Diodes

LED Color
30K 3000K LED
40K 4000K LED
50K 5000K LED

Nominal Watts
17 17 Watts


Volts
UNV 120-277V

Color
BZ Bronze
WH White
CC Custom Color

Options
EM 90 Min Emergency
SP Surge Protection
D10 0-10V Dimming
SC Sensing Control *
PC Photocell

* Up to 15 Feet Mounting

SPECIFICATIONS

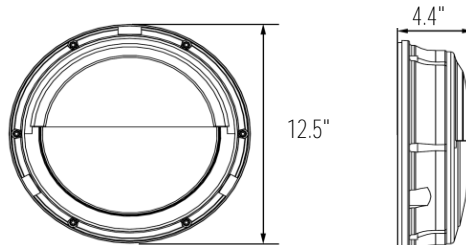

OPTIONS/ACCESSORIES

Specifications Subject to Change

