



PAL LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing
- Tempered Flat Clear Glass Lens
- Bronze Powder Coat Finish, Optional Custom Color
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V, Optional 480V
- 3K, 4K or 5K LED Color Options
- Twist-Lock Photocell Included
- Integral Heat Sinking
- Choice of Light Distributions
- Optional Surge Protection
- Optional Dimming
- Optional Wire Guard
- Optional House Side Shield

APPLICATIONS

- General Area Lighting
- Parking, Roadway, Area
- Schools, Commercial Buildings, Communities

ELECTRICAL

- 120-277V 50/60Hz
- Optional 480V 50/60Hz
- 279 Watts; 29,091 Lumens

INSTALLATION

- Mounts with 90° Slip Fitter, Adjustable Slip Fitter, or U-Bracket

CERTIFICATIONS/LISTINGS


- CSA Listed
- IP66
- Listed for Wet Locations

PROJECT \_\_\_\_\_ TYPE \_\_\_\_\_


QTY \_\_\_\_\_ NOTES \_\_\_\_\_ APPROVAL \_\_\_\_\_

ORDERING/SPECIFYING INFORMATION:


EXAMPLE: PAL L 279 T3 40K UNV

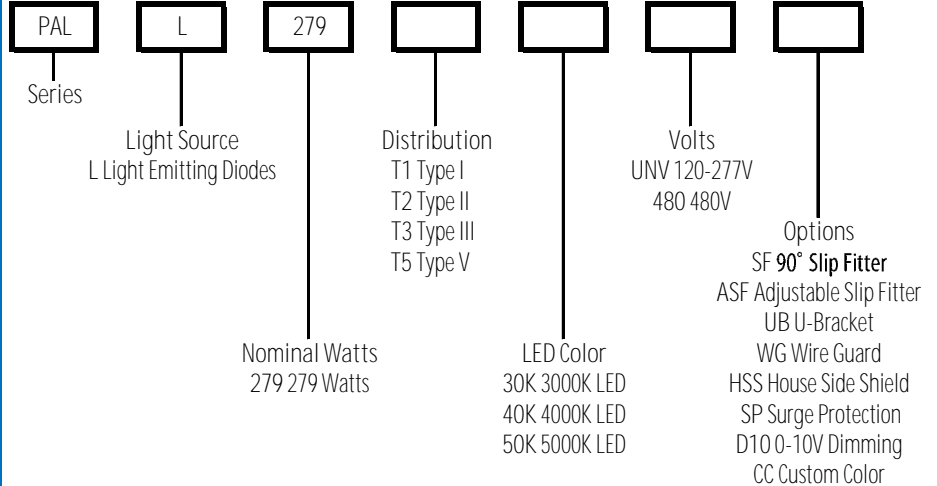

SPECIFICATIONS

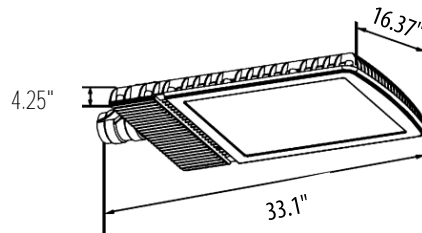

OPTIONS/ACCESSORIES

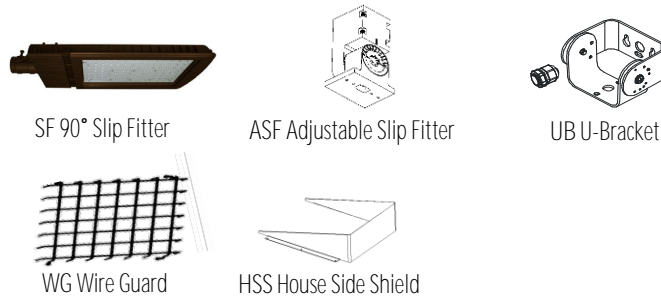

Specifications Subject to Change

