



WC LED Series

SPECIFICATIONS

- White ABS Housing with Hinged Front
- Polycarbonate LED Opal Lens
- CRI LEDs
- Universal Volt LED Driver with Optional Dimming
- 4K LED Color
- Tamper Resistant Screws
- Optional Motion Sensing Control for Bi-Level Operation
- Optional Emergency Battery
- Optional Surge Protection

APPLICATIONS

- General Area Lighting
- Building Facade Lighting
- Schools, Commercial Buildings, Universities

ELECTRICAL

- 120-277V 50/60Hz
- 20 Watts; 1,869 Lumens
- 30 Watts; 2,633 Lumens

INSTALLATION

- Surface Ceiling or Wall Mount Over Recessed Box

CERTIFICATIONS/LISTINGS

- CSA Listed
- IP65
- Listed for Wet Locations



PROJECT _____ TYPE _____

QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: WCL L 30 40K UNV



Series
WCM
WCL

L

Light Source
L Light Emitting Diodes

30

Nominal Watts
20 20 Watts (WCM)
30 30 Watts (WCL)

40K

LED Color
40K 4000K LED

UNV


Volts
UNV 120-277V

[Options Box]

Options
EM 90 Min Emergency
SP Surge Protection
D10 0-10V Dimming
SC Sensing Control*

* Up to 15 Feet Mounting

SPECIFICATIONS

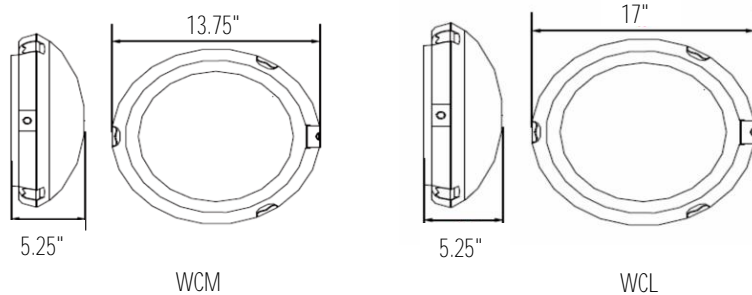

OPTIONS/ACCESSORIES

Specifications Subject to Change

