



RC LED Series

SPECIFICATIONS

- Die Cast Aluminum Housing with Formed Steel Plate
- UV-Stabilized Acrylic Optical Lens
- Standard White Powder Coat Finish, Optional Custom Color
- CRI LED Aluminum Substrate Board
- Universal Volt LED Driver 120-277V, Optional 480V
- 3K, 4K and 5K LED Color Options
- Optional Surge Protection
- Optional Dimming
- Optional Emergency

APPLICATIONS

- Garage Area Lighting
- Retail Centers, Industrial Parks, Airports
- Schools, Commercial Buildings, Universities

ELECTRICAL

- 120-277V; 50/60Hz
- Optional 480V; 50/60Hz (30 & 37 Watts Only)
- 30 Watts; 4,776 Lumens (3K & 4K Only)
- 37 Watts; 5,890 Lumens (4K Only)
- 48 Watts; 7,642 Lumens (4K & 5K Only)
- 65 Watts; 10,348 Lumens (4K Only)

INSTALLATION

- Recessed Mount

CERTIFICATIONS/LISTINGS

- CSA Listed
- IP54
- Listed for Wet Locations under Covered Canopy




PROJECT _____ TYPE _____


QTY _____ NOTES _____ APPROVAL _____

ORDERING/SPECIFYING INFORMATION:

EXAMPLE: RC L 30 40K UNV WH

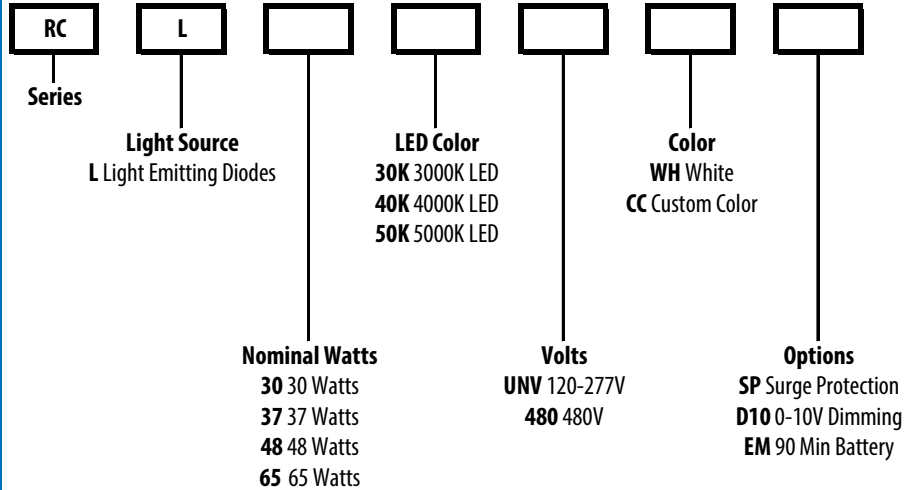

SPECIFICATIONS

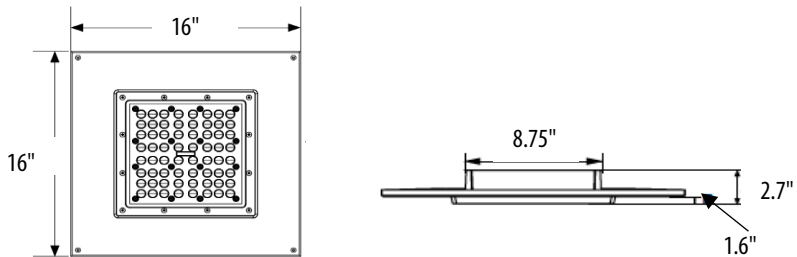

OPTIONS/ACCESSORIES

Specifications Subject to Change

